


## Controllers

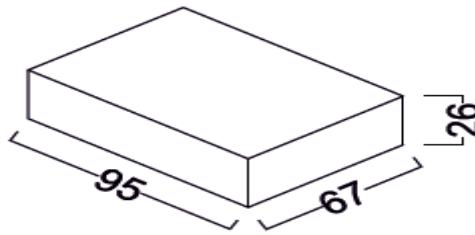

**Model:** iLED 4A3 RGB RF 01

### PRODUCT DESCRIPTION

The controllers are in the range of 60W, 90W, 110W, 144W, 216W, 220W, 288W, 432W and 600W. With corresponding DC voltage range of 5V, 12V, 18V, 24V. XXX Aluminum Housing. More suitable for strip light, Wall washer & Etc.

### SPECIFICATION

Material	: Aluminum cover
Output Power	: 60W (5V), 144W (12V), 288W (24V)
I/P Voltage	: 5V, 12V, 18V, 24V DC
Output Current	: 4A * 3 Channel
Features	: Wireless RF Remote with 6 Keys
Type	: RF Controller
LED colors	: RGB
Dimension	: L-95 X W-67 X H-26 mm
Driver	: Internal
Operating Temp	: -40°C ~ + 70°C
IP Rating	: IP 20
Dimmable	: DALI, Edge pulse/0/1-10 V dimming control (Optional)

### ORDERING INFORMATION

iLED	60/144/ 288	RF	01	RGB
Brand name	Rated Power	Controller	Model No.	Red Green Blue

The technical specifications may vary due to continuous improvement without prior notice.

\*Logos of products and companies are used for reference

[www.iled.in](http://www.iled.in)

iLED Lighting Systems Pvt Ltd  
Chennai, Tamil Nadu, India 600096