
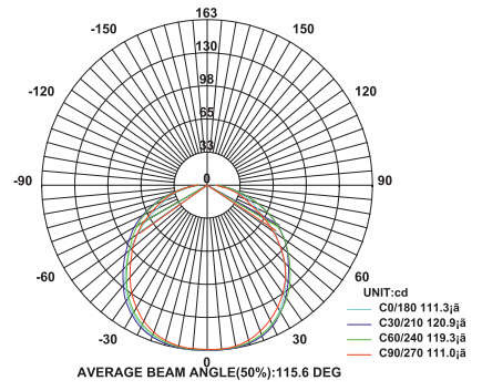


## COB Down Light

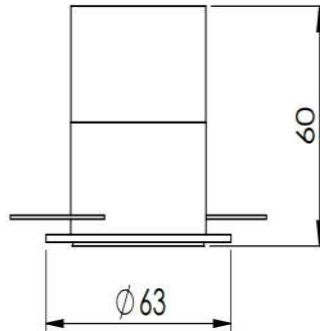

**Model:** iLED 07 RDL NA COB 25

### PRODUCT DESCRIPTION


The recessed mount luminaire is made of aluminium and it is available in 7 W. Universal power supply/drivers with input range of 90 V to 270 V AC 50/60 Hz and PF >0.96. It is ideal for hotel, showroom, home, office, theatres, auditorium, etc.

*Different fixture colours available on request.*

### SPECIFICATION

Material	: Ventilated aluminium cooling with polished reflector
Mounting	: Recessed mount
Power	: 7 W
Voltage	: 90 – 270 V AC 50/60 Hz
Power Factor	: >0.96
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W (lumen efficacy: 160 -180 lm)
Dimension	: D-63 X H-60 mm
Cut-out Diameter	: 53 mm
Driver	: External
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 20
Led used	: <b>CREE</b>
Dimmable Interface	: <b>CASAMBI</b> , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

### BEAM ANGLE

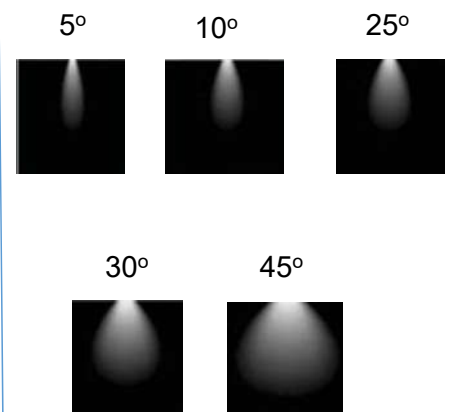

## VARIANTS

MODEL	RATED POWER	DIMENSION
iLED 07 RDH COB 24 ADJ	7 W	D-68 X H-76 mm
iLED 07 RDL NA COB 25	7 W	D-63 X H-60 mm

## ORDERING INFORMATION

iLED	07	RDL NA	COB	25	W	WW	NW
Brand name	Rated Power	Round Down Light Non Adjustable	Chip On Board	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

\*Logos of products and companies are used for reference

[www.iled.in](http://www.iled.in)

iLED Lighting Systems Pvt Ltd  
Chennai, Tamil Nadu, India 600096