
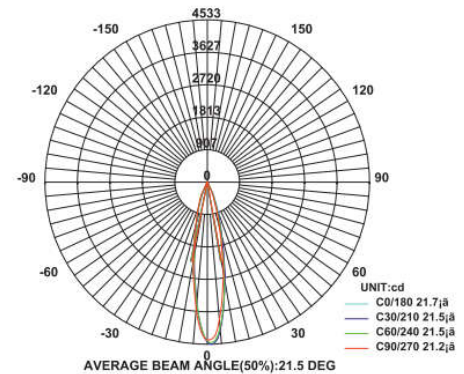


COB Down Light

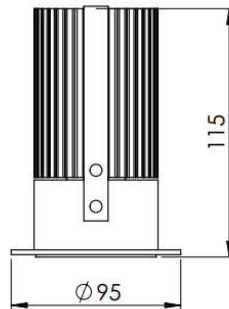

Model: iLED 10 RDH COB 10 – DEEP DRAWN ADJ


PRODUCT DESCRIPTION

The recessed mount luminaire is made of aluminium and depending on the fixture size it is available in 10 W and 15 W. Universal power supply/drivers with input range of 90 V to 270 V AC 50/60 Hz and PF >0.96. It is ideal for hotel, showroom, home, office, theatres, auditorium, etc. *Different fixture colours available on request.*

SPECIFICATION

Material	: Ventilated aluminium cooling with polished reflector
Mounting	: Recessed mount
Power	: 10 W, 15 W
Voltage	: 90 – 270 V AC 50/60 Hz
Power Factor	: >0.96
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W (lumen efficacy: 160 -180 lm)
Dimension	: D-90 X H-115 mm D-95 X H-135 mm
Cut-out diameter	: 70 mm, 76 mm
Driver	: External
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 20
Led used	: CREE
Dimmable Interface	: CASAMBI , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

BEAM ANGLE

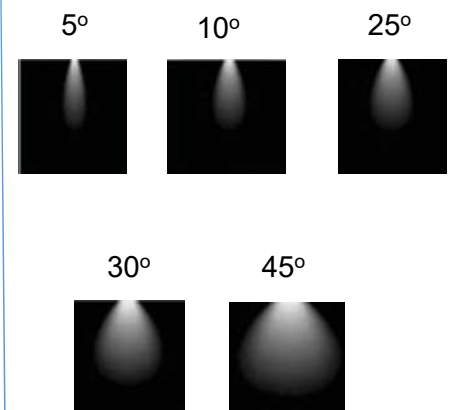

VARIANTS

MODEL	RATED POWER	DIMENSION
iLED 10 RDH COB 10 – DEEP DRAWN ADJ	10 W	D-90 X H-115 mm
iLED 15 RDH COB 10 – DEEP DRAWN ADJ	15 W	D- 95 X H- 135 mm
iLED 10 RDH COB 11 – DEEP DRAWN ADJ	10 W	D-95 X H-115 mm
iLED 15 RDH COB 12 – DEEP DRAWN ADJ	15 W	D-95 X H-90 mm

ORDERING INFORMATION

iLED	10	RDH	COB	10	W	WW	NW
Brand name	Rated Power	Round Hotel	Chip On Board	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in

iLED Lighting Systems Pvt Ltd
Chennai, Tamil Nadu, India 600096