


25°

10°

45°

Ceiling Recess Mount Lights With Lens

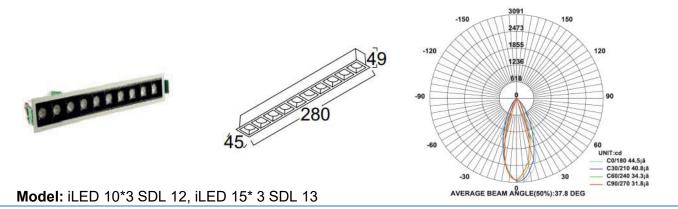

PRODUCT DESCRIPTION


The Ceiling recessed mount luminaire is made of aluminium with PMMA lens and available in 30 W and 45 W with different angle reflector. It is ideal for hotel, showroom, home, offices, theaters etc. Different fixture colours available on request.

SPECIFICATION

| Material | : Ventilated powder coated | BEAM ANGLE | |
|--|--|------------|-----|
| | aluminum with different angle reflector | 5° | 10ª |
| Mounting | : Recess mount with trim/trimless | | |
| Power | : 30 W, 45 W | | - 4 |
| Voltage | : 12/24 V DC , 230 V AC | | |
| LED colors | : White 6000-6400 K | | |
| | Neutral White 4000-4500 K | | |
| | Warm White 2700-3000 K | | |
| Lumen Flux | : 120-140 lm/W (lumen efficacy: 160 -180 lm) | 30° | |
| Dimension | : L-280 X W-45 X H-49 mm, | | |
| | L-415 X W-45 X H-49 mm | | |
| Cut out dimension | : L-273 X W-37 X H-49 mm | 1000 | |
| | L-405 X W-37 X H-49 mm | | |
| Driver | : External | | |
| Operating Temp | : -40°C ~ + 70°C | | |
| CRI | : 85 | | |
| IP Rating | : IP 20 | | |
| Led used | CREE 🚖 | | |
| Dimmable Interface | :CASAMBI, Colour tunable (2700 K - 6000 K) | , DALI, | |
| Edge pulse/0/1-10 V dimming control (optional) | | | |

Edge pulse/0/1-10 V dimming control (optional)

ORDERING INFORMATION



The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference