
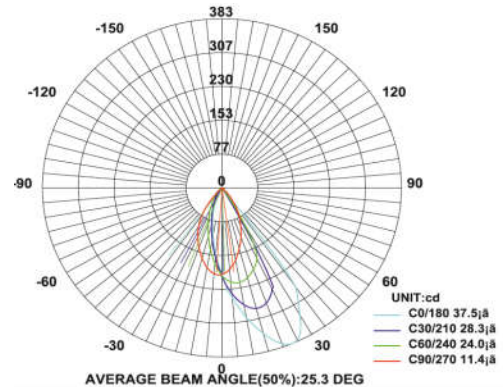


## Bollards

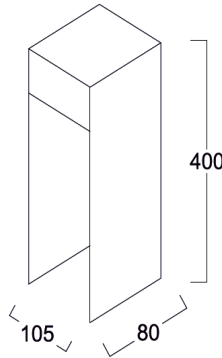

**Model:** iLED 12 BD 9830 04

### PRODUCT DESCRIPTION

The bollard luminaire is made of die cast aluminium and available in the range of 6 W, 7 W, 12 W. Universal power supply/drivers with input range of 90 V to 270 V AC, 50/60 Hz and PF >0.96. It is ideal for gate lights and pathway etc.

*Different fixture colours available on request. Available at different heights 200/400/600/800 mm.*

### SPECIFICATION

Material	: Ventilated powder coated die cast aluminium with tempered glass
Mounting	: Surface mount
Power	: 6 W, 7 W, 12 W
Voltage	: 90 – 270 V AC, 50/60 Hz
Power Factor	: >0.96
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W (lumen efficacy: 160 -180 lm)
Dimension	: L-105 X W-80 X H-400 mm
Driver	: Internal
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 67
Led used	: <b>CREE</b> ⇄
Dimmable (optional)	: <b>CASAMBI</b> , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control

### ORDERING INFORMATION

<b>iLED</b>	<b>12</b>	<b>BD</b>	<b>04</b>	<b>W</b>	<b>WW</b>	<b>NW</b>
Brand name	Rated Power	Bollard	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

\*Logos of products and companies are used for reference

[www.iled.in](http://www.iled.in)

iLED Lighting Systems Pvt Ltd  
Chennai, Tamil Nadu, India 600096