
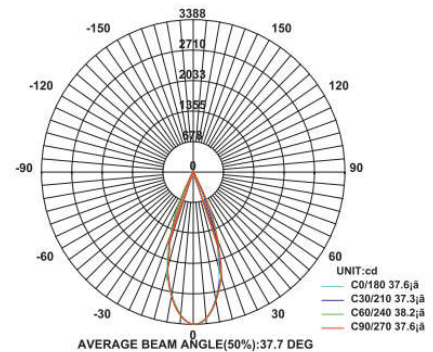


## COB Down Light

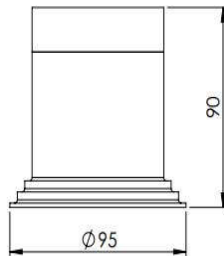

**Model:** iLED 15 RDH COB 12 – FRONT REMOVABLE

### PRODUCT DESCRIPTION


The recessed mount luminaire is made of aluminium front removable without disturbing the ceiling ring, does not damage POP ceiling and depending on the fixture size it is available in 10 W and 15 W. Universal power supply/drivers with input range of 90 V to 270 V AC 50/60 Hz and PF >0.96. It is ideal for hotel, showroom, home, office, theatres, auditorium, etc.

*Different fixture colours available on request.*

### SPECIFICATION

Material	: Ventilated aluminium cooling with polished reflector
Mounting	: Recessed mount
Power	: 10 W, 15 W
Voltage	: 90 – 270 V AC 50/60 Hz
Power Factor	: >0.96
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W (lumen efficacy: 160 -180 lm)
Dimension	: D-95 X H-90 mm
Cut-out diameter	: 75/85 mm
Driver	: External
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 20
Led used	: <b>CREE</b>
Dimmable Interface	: <b>CASAMBI</b> , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

### BEAM ANGLE

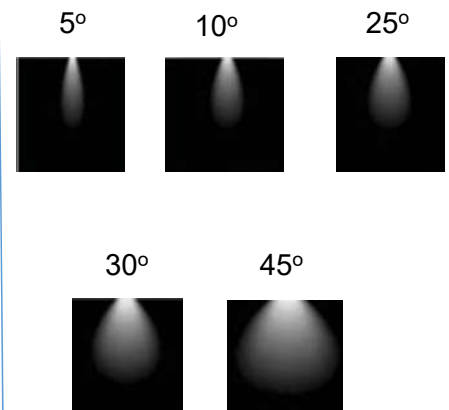

## VARIANTS

MODEL	RATED POWER	DIMENSION
iLED 10 RDH COB 10 – DEEP DRAWN ADJ	10 W	D-90 X H-115 mm
iLED 10 RDH COB 11 – DEEP DRAWN ADJ	10 W	D-95 X H-115 mm
iLED 15 RDH COB 12 – DEEP DRAWN ADJ	15 W	D-95 X H-90 mm

## ORDERING INFORMATION

iLED	15	RDH	COB	12	W	WW	NW
Brand name	Rated Power	Round Hotel	Chip On Board	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

\*Logos of products and companies are used for reference

[www.iled.in](http://www.iled.in)

iLED Lighting Systems Pvt Ltd  
Chennai, Tamil Nadu, India 600096