
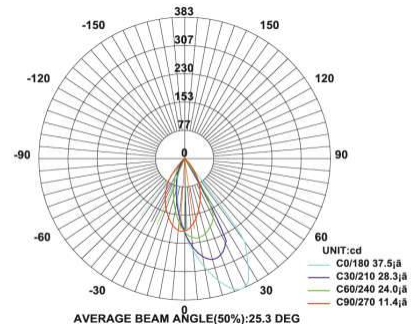


## Bollards



**Model:** iLED 20 BD 24

### PRODUCT DESCRIPTION

The bollard luminaire is made of extruded aluminium diecast and available in 15-20W. Universal power supply/drivers with input range of 90 V to 270 V AC 50/60 Hz and PF >0.96. It is ideal for drive ways, pathway, gardens & etc. Different fixture colours available on request.

### SPECIFICATION

Material	: Aluminium Die cast with Powder coat and diffuser
Mounting	: Surface mount
Power	: 15-20 W
Voltage	: 90 – 270 V AC/12-24V DC
Power Factor	: >0.96
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W (lumen efficacy: 160 -180 lm)
Dimension	: D-200 X H-720 mm
Driver	: Internal
Operating Temp	: -40°C ~ + 70°C
CRI	: >85
IP Rating	: IP 67
Led used	: <b>CREE</b> ⇄
Dimmable (optional)	: <b>CASAMBI</b> , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control

### ORDERING INFORMATION

<b>iLED</b>	<b>20</b>	<b>BD</b>	<b>24</b>	<b>W</b>	<b>WW</b>	<b>NW</b>
Brand name	Rated Power	Bollard	Model No.	White	Warm White	Neutral White