
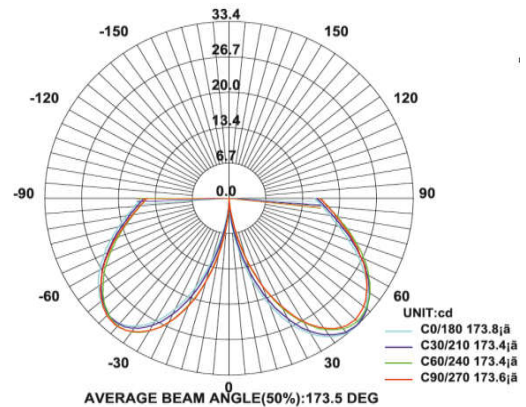


## Bulbs



**Model:** iLED 3 B 01

## PRODUCT DESCRIPTION

The bulb is made of acrylonitrile butadiene styrene plastic with PMMA milky cover and available in 3 W. Universal power supply/drivers with input range of 90 V to 270 V AC, 50/60 Hz and PF >0.96. It is ideal for hotel, restaurants, home, hospitals etc.

*Different fixture colours available on request.*

## SPECIFICATION

Material	: Acrylonitrile butadiene styrene plastic with PMMA milky cover
Mounting	: Retrofit: E14/E27/B22
Power	: 3/4 W
Voltage	: 90 – 270 V AC, 50/60 Hz
Power Factor	: >0.96
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W (lumen efficacy: 160 -180 lm)
Dimension	: D-38 X H-80 mm
Driver	: Internal
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 20
Led used	: <b>CREE</b> ⇄
Dimmable Interface	: <b>CASAMBI</b> , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

## ORDERING INFORMATION

iLED	3	B	01	W	WW	NW
Brand name	Rated Power	Bulb	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

\*Logos of products and companies are used for reference

[www.iled.in](http://www.iled.in)

iLED Lighting Systems Pvt Ltd  
Chennai, Tamil Nadu, India 600096