
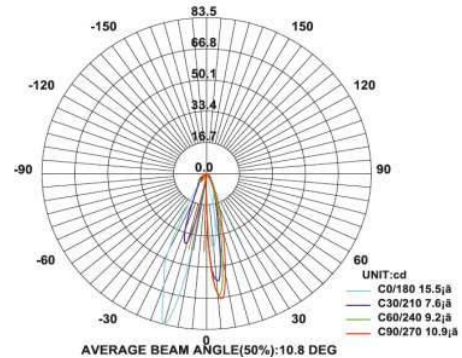


## Burials & Pathway Lights



**Model:** iLED 3 PWL 04-Twoway

### PRODUCT DESCRIPTION

The outdoor burial mount luminaire is made of aluminium with PMMA lens and available in 3 W and 9 W. DC/Universal power supply/drivers with input range of 90 V to 270 V AC 50/60 Hz and PF >0.96. It is ideal for sign, facade area, accent and general lighting area etc. Different fixture colours available on request.

### SPECIFICATION

Material	: Ventilated aluminum die casting with PMMA lens
Mounting	: Outdoor burial mount
Power	: 3/9 W
Voltage	: 12 / 24 V AC/DC, 230V AC
Power Factor	: >0.96
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W (lumen efficacy: 160 -180 lm)
Dimension	: D-50 X H-93 mm
Driver	: Internal
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 67
Led used	: <b>CREE</b> ⇄
Dimmable Interface	: <b>CAS</b> ▲ <b>MBI</b> , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

### ORDERING INFORMATION

<b>iLED</b>	<b>3</b>	<b>PWL</b>	<b>04</b>	<b>W</b>	<b>WW</b>	<b>NW</b>
Brand name	Rated Power	Path Way Light	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

\*Logos of products and companies are used for reference

[www.iled.in](http://www.iled.in)

iLED Lighting Systems Pvt Ltd  
Chennai, Tamil Nadu, India 600096