
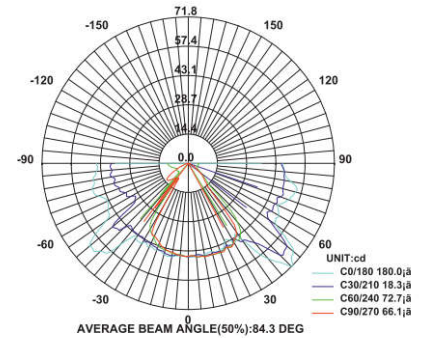


Wall Lights Outdoor



Model: iLED 4 CWL OD 03

PRODUCT DESCRIPTION


The wall luminaire is made of die cast aluminium. It is available in 3 W and 4 W. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.96. It is ideal for garden lights.

Different fixture colours available on request.

SPECIFICATION

Material	: Square Outdoor Wall Light 4Way Graphite Black Finish
Mounting	: Surface Mount
Power	: 4 W
Voltage	: 90 – 305 V AC 50/60 Hz
Power Factor	: >0.96
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W (lumen efficacy: 160 -180 lm)
Dimension	: W-50 X H-110 x L-110 mm
Driver	: Internal
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 65
Led used	: CREE ⇄
Dimmable Interface	: CASAMBI , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

BEAM ANGLE

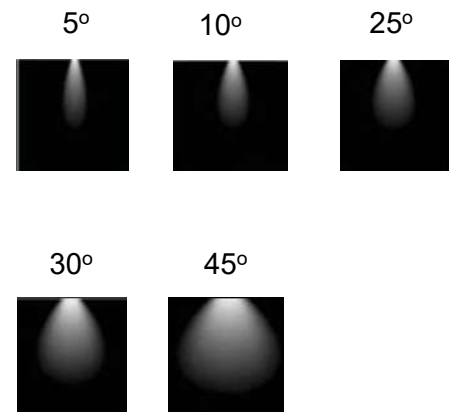

ORDERING INFORMATION

iLED	4	CWL	OD	03	W	WW	NW
Brand name	Rated Power	Compound Wall Light	Outdoor	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in

iLED Lighting Systems Pvt Ltd
Chennai, Tamil Nadu, India 600096