
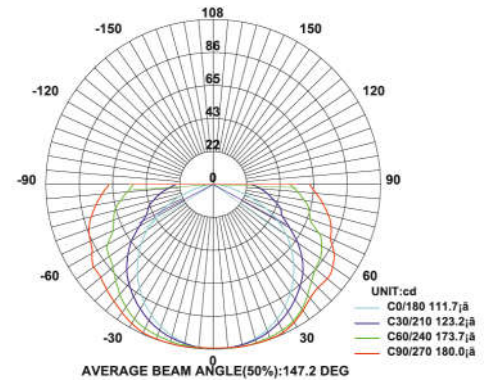


## Tube Lights

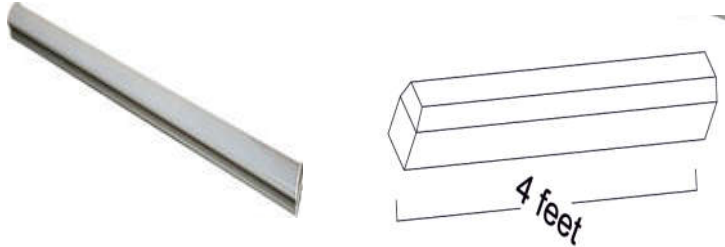

**Model:** iLED 40 TL 09-IP 67

### PRODUCT DESCRIPTION

The tube light luminaire is made of aluminium and depending on the size it is available in the range of 5 W to 48 W. Universal power supply/drivers with input range of 90 V to 270 V AC 50/60 Hz and PF >0.96. It is ideal for hotel, showroom, home, office, theatres, auditorium, etc. *Different fixture colours available on request.*

### SPECIFICATION

|                    |  |
|--------------------|--|
| Material           | : Aluminum housing with PCB with polycarbonate Milky cover   |
| Power              | : 40 W   |
| Voltage            | : 90 – 270 V AC 50/60 Hz   |
| Power Factor       | : >0.96  |
| LED colors         | : White 6000-6400 K<br>Neutral White 4000-4500 K<br>Warm White 2700-3000 K                                   |
| Lumen Flux         | : 120-140 lm/W (lumen efficacy: 160 -180 lm)   |
| Dimension          | : L-2450 X W-40 X H-35 mm  |
| Driver             | : Internal   |
| Operating Temp     | : -40°C ~ + 70°C   |
| CRI                | : 85   |
| IP Rating          | : IP 67  |
| Led used           | : <b>CREE</b> ⇄  |
| Dimmable Interface | : <b>CASAMBI</b> , Colour tunable (2700 K – 6000 K), DALI,<br>Edge pulse/0/1-10 V dimming control (optional) |

### ORDERING INFORMATION

|            |             |            |           |       |            |               |
|------------|-------------|------------|-----------|-------|------------|---------------|
| iLED       | 40          | TL         | 09        | W     | WW         | NW            |
| Brand Name | Rated Power | Tube Light | Model No. | White | Warm White | Neutral White |

The technical specifications may vary due to continuous improvement without prior notice.

\*Logos of products and companies are used for reference

[www.iled.in](http://www.iled.in)

iLED Lighting Systems Pvt Ltd  
Chennai, Tamil Nadu, India 600096