


EMERGENCY Signages

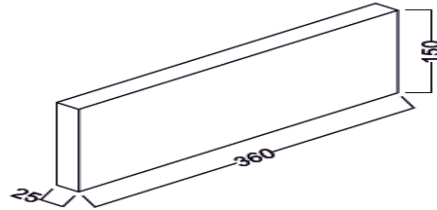

Model: iLED 1 ES 01 SS G/R-ECO

PRODUCT DESCRIPTION

The Signage luminaire is in the range of 1W. Universal power supply/drivers with input range of 90 V to 305 V AC, 50/60 Hz and PF >0.95. The material used is Aluminum casing with transparent/printed acrylic or glass. It is ideal for emergency/ fire exit and signages etc. *Different fixture colours available on request.*

SPECIFICATION

Material	: Aluminum die casing transparent/printed acrylic or glass
Lumen Efficacy	: 160 – 180 lumens
Mounting	: Suspended
BACK UP TIME	: 90 & 180 MINUTES
Power	: 1W
Voltage	: 90 V to 305 V AC, 50/60 Hz
Power Factor	: >0.95
LED colors	: Red, Green
Lumen Flux	: 25 lm/W
Dimension	: L-360 X W-25 X H-150 mm
Driver	: Internal
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 67
Led used	: CREE ⇄
Dimmable Interface	: CASAMBI , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

VARIANTS

MODEL	RATED POWER	DIMENSION
iLED 1 ES 02 DS G/R-ECO	1 W	L-360 X W-25 X H-150mm

ORDERING INFORMATION

iLED	1	ES	01	R	G
Brand name	Rated Power	Exit Sign	Model No.	Red	Green

The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in

iLED Lighting Systems Pvt Ltd
Chennai, Tamil Nadu, India 600096