
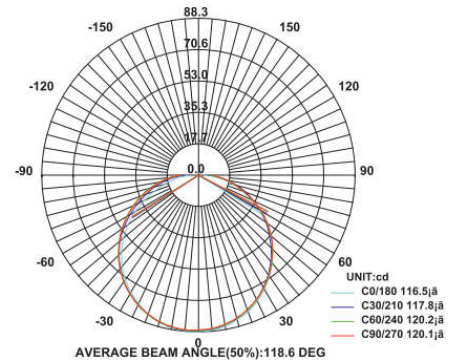


Wall Lights Outdoor

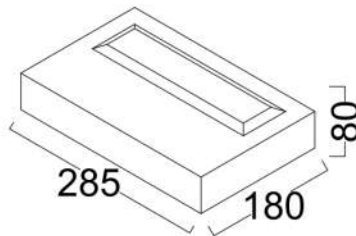

Model: iLED 10 FD014 OD 07 ECO

PRODUCT DESCRIPTION

The wall luminaire is made of die cast aluminium. It is available in 10 W and comes in various designs. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.96 . It is ideal for garden lights.

Different fixture colours available on request.

SPECIFICATION

Material	: Aluminium die cast with polycarbonate milky diffuser
Mounting	: Surface Mount
Power	: 10 W
Voltage	: 90 – 305 V AC 50/60 Hz
Power Factor	: >0.96
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W (lumen efficacy: 160 -180 lm)
Dimension	: L-275 X W-182 X H-180 mm
Driver	: Internal
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 65
Led used	: CREE ⇄
Dimmable Interface	: CASAMBI , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

ORDERING INFORMATION

iLED	10	FD014	OD	07	W	WW	NW
Brand name	Rated Power		Outdoor	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in

iLED Lighting Systems Pvt Ltd
Chennai, Tamil Nadu, India 600096