
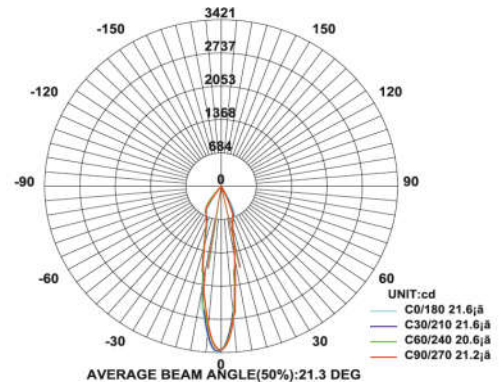


## Garden Lights Spike IP65

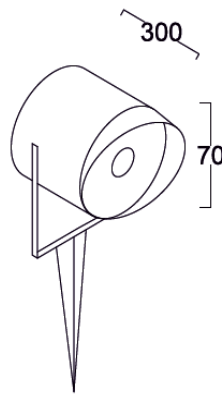

**Model:** iLED 10 GL 04

### PRODUCT DESCRIPTION

The garden luminaire is made of die cast aluminium with toughened glass and it is available in 10 W. universal power supply/drivers with input range of 90 V to 270 V ac 50/60 Hz and PF >0.96. it is ideal for garden, gate lights etc.

*Different fixture colours available on request.*

### SPECIFICATION

Material	: Ventilated aluminum die cast with polished reflector & toughened glass
Mounting	: Surface mount/ Spike mount
Power	: 10 W
Voltage	: 90 – 270 V AC 50/60 Hz
Power Factor	: >0.96
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W (lumen efficacy: 160 -180 lm)
Dimension	: D-70 X H-320 mm
Driver	: Internal
Operating Temp	: -40°C ~ + 70°C
CRI	: >85
IP Rating	: IP 65
Led used	: <b>CREE</b> ⇄
Dimmable Interface	: <b>CASAMBI</b> , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

### ORDERING INFORMATION

iLED	10	GL	04	W	WW	NW
Brand name	Rated Power	Garden Light	Model No.	White	Warm White	Neutral White