


## Panel Down Lights Milky (Back Lit)

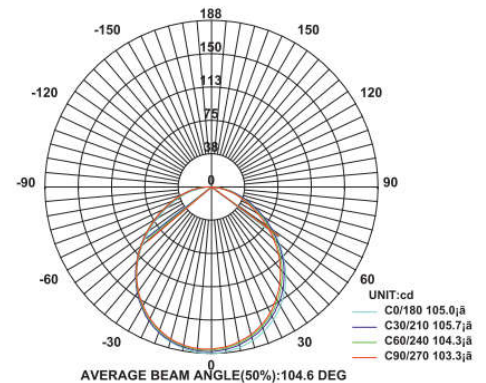

**Model:** iLED 10 PDL 01

### PRODUCT DESCRIPTION

The Back lit panel down luminaire is made of powder coated aluminium housing with PMMA high transitive milky diffuser and depending on the fixture size it is available in the range of 10W. Universal power supply/drivers with input range of 90 V to 270 V AC, 50/60 Hz and PF >0.96. It is ideal for hotel, showroom, home, office, theatres, auditorium, etc. *Different fixture colours available on request.*

### SPECIFICATION

Material	: Powder coated aluminium housing with PMMA high transitive milky diffuser
Mounting	: Recessed mount
Power	: 10 W
Voltage	: 90 – 270 V AC, 50/60 Hz
Power Factor	: >0.96
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W (lumen efficacy: 160 -180 lm)
Dimension	: D-138 X H-38 mm
Cut-out diameter	: 110 mm
Driver	: External
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 20
Led used	: <b>CREE</b> ⇄
Dimmable Interface	: <b>CASAMBI</b> , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

## VARIANTS

MODEL	RATED POWER	DIMENSION
iLED 10 PDL 01	10 W	D-138 x H-38mm
iLED 16 PDL 02	16 W	D-190 X H-38mm H-43mm
iLED 6 PDL 3IN 1 07	6 W	D-120 x H-40mm (RND)
iLED 12 PDL 3IN1 08	12 W	170 x 40mm(RND)
iLED 18 PDL 3IN 1 09	18 W	D-220 x H-40mm(RND)

MODEL	RATED POWER	CUT-OUT DIMENSION
iLED 10 PDL 01	10 W	D-110mm
iLED 16 PDL 02	16 W	D-160mm D-152mm
iLED 6 PDL 3IN 1 07	6 W	D-83mm
iLED 12 PDL 3IN1 08	12 W	D-112mm
iLED 18 PDL 3IN 1 09	18 W	D-156mm

## ORDERING INFORMATION

iLED	10	PDL	01	W	WW	NW
Brand name	Rated Power	Panel Down Light	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

\*Logos of products and companies are used for reference

[www.iled.in](http://www.iled.in)

iLED Lighting Systems Pvt Ltd  
Chennai, Tamil Nadu, India 600096