


Presence & Movement sensor light

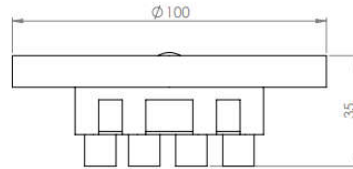

Model: iLED 100 PIR 01

PRODUCT DESCRIPTION

The presence & movement sensor luminaire is made of plastic housing with PIR sensor and it can be used upto 100 W. Universal power supply/drivers with input range of 90 V to 270 V AC, 50/60 Hz and PF >0.96. It is ideal for corridor, garage, balcony, warehouse, kitchen, cloakroom, storage, toilet, etc.

Different fixture colours available on request.

SPECIFICATION

Material	: Plastic housing with PIR sensor
Mounting	: Recess mount
Duration	: 10 sec to 4 minutes adjustable
Detection range	: 180o
Power	: 100 W (customised designs available for higher wattaged)
Voltage	: 90 – 270 V AC, 50/60 Hz
Power Factor	: >0.96
Lux level	: 2-2000 lux adjustable
Dimension	: D-100 X H-35 mm
Cut out dimension	:L-45 XW-80 XH-12mm
Driver	: Internal
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 20
Led used	: CREE
Dimmable Interface	: CASAMBI , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

ORDERING INFORMATION

Brand name	Rated Power	Passive Infrared	Model No.

The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in

iLED Lighting Systems Pvt Ltd
Chennai, Tamil Nadu, India 600096