
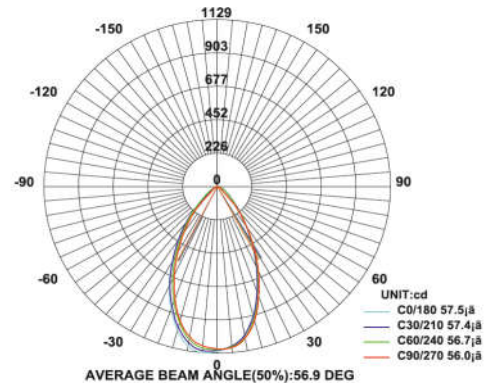


## Spots Lights & Retrofits



**Model:** iLED 12-15 AR 111 COB 06

### PRODUCT DESCRIPTION


The Spots Lights & Retrofits luminaires are in the range of 12- 15W. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95. The material used is Ventilated aluminum cooling with PMMA lens. It is ideal for hotel, showroom, home, office, theatres, auditorium, etc.

*Different fixture colours available on request.*

### SPECIFICATION

Material	: Ventilated aluminum cooling with PMMA lens
Lumen Efficacy	: 160 – 180 lumens
Mounting	: Retrofit with external power supply
Power	: 12-15 W
Voltage	: 90 V to 305 V AC 50/60 Hz
Power Factor	: >0.95
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W
Dimension	: D-110 X H-70 mm
Driver	: External
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 20
Angle	: 5°, 10°, 25°, 30°, 45°
Led used	: <b>CREE</b> ⇄
Dimmable Interface	: <b>CASAMBI</b> , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

### BEAM ANGLE

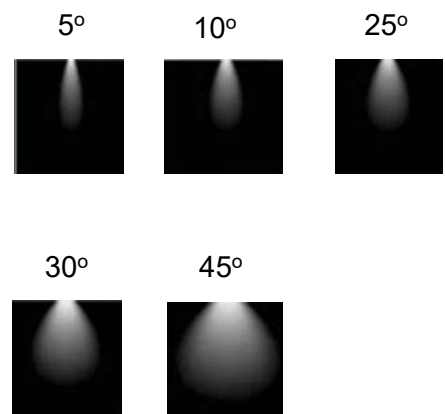

### ORDERING INFORMATION

iLED	12-15	MR	06	W	WW	NW
Brand name	Rated Power	Multi faceted Reflector	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

\*Logos of products and companies are used for reference

[www.iled.in](http://www.iled.in)

iLED Lighting Systems Pvt Ltd  
Chennai, Tamil Nadu, India 600096