
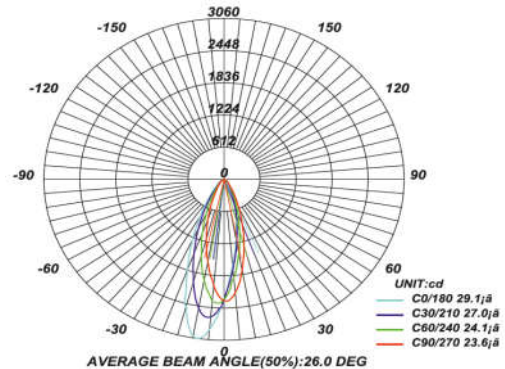


Spots Lights & Retrofits



Model: iLED 12 MR16 COB 09

PRODUCT DESCRIPTION


The Spots Lights & Retrofits luminaires are in the range of 4 W, 5 W, 6 W, 8 W, 12W. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95. The material used is Ventilated aluminum cooling with PMMA lens. It is ideal for hotel, showroom, home, office, theatres, auditorium, etc.

Different fixture colours available on request.

SPECIFICATION

| | |
|--------------------|---|
| Material | : Ventilated aluminum cooling with PMMA lens |
| Lumen Efficacy | : 160 – 180 lumens |
| Mounting | : Retrofit with external power supply |
| Power | : 12 W |
| Voltage | : 90 V to 305 V AC 50/60 Hz |
| Power Factor | : >0.95 |
| LED colors | : White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K |
| Lumen Flux | : 120-140 lm/W |
| Dimension | : D-50 X H-70 mm |
| Driver | : External |
| Operating Temp | : -40°C ~ + 70°C |
| CRI | : 85 |
| IP Rating | : IP 20 |
| Angle | : 5°, 10°, 25°, 30°, 45° |
| Led used | : CREE |
| Dimmable Interface | : CASAMBI , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional) |

BEAM ANGLE

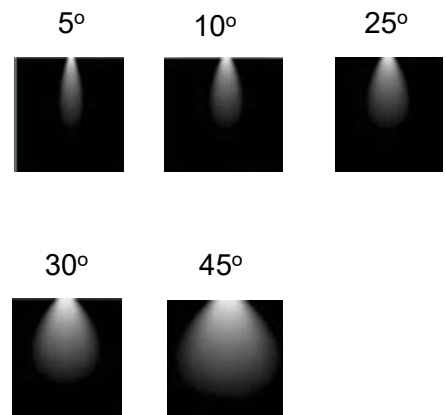

ORDERING INFORMATION

| | | | | | | |
|------------|-------------|-------------------------|-----------|-------|------------|---------------|
| iLED | 12 | MR | 09 | W | WW | NW |
| Brand name | Rated Power | Multi faceted Reflector | Model No. | White | Warm White | Neutral White |

The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in

iLED Lighting Systems Pvt Ltd
Chennai, Tamil Nadu, India 600096