
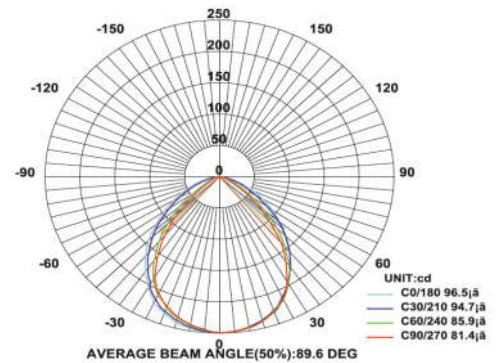


## In wall Lights Outdoor



**Model:** iLED 15 IWL 06-IP 65

### PRODUCT DESCRIPTION

The recessed mount wall luminaire is made of aluminium die cast with powder coated and glass depending on the fixture size it is available in the range of 15 W . Universal power supply/drivers with input range of 90 V to 270 V AC, 50/60 Hz and PF >0.96. It is ideal for outdoor, passages, corridors etc.

*Different fixture colours available on request.*

### SPECIFICATION

|                    |  |
|--------------------|--|
| Material           | : Aluminum die cast with powder coated glass   |
| Mounting           | : In wall  |
| Power              | : 15 W   |
| Voltage            | : 90 – 270 V AC, 50/60 Hz  |
| Power Factor       | : >0.96  |
| LED colors         | : White 6000-6400 K<br>Neutral White 4000-4500 K<br>Warm White 2700-3000 K                                   |
| Lumen Flux         | : 120-140 lm/W (lumen efficacy: 160 -180 lm)   |
| Dimension          | : L-230 X W-128 X H-90 mm  |
| Cut out dimension  | : L-220 X W-123 X H-83mm   |
| Driver             | : Internal   |
| Operating Temp     | : -40°C ~ + 70°C   |
| CRI                | : 85   |
| IP Rating          | : IP 65  |
| Led used           | : <b>CREE</b> ⇄  |
| Dimmable Interface | : <b>CASAMBI</b> , Colour tunable (2700 K – 6000 K),<br>DALI, Edge pulse/0/1-10 V dimming control (optional) |

### ORDERING INFORMATION

|            |             |               |           |       |            |               |
|------------|-------------|---------------|-----------|-------|------------|---------------|
| iLED       | 15          | IWL           | 06        | W     | WW         | NW            |
| Brand name | Rated Power | In Wall Light | Model No. | White | Warm White | Neutral White |