


Recess Mount Ceiling Down Lights(back lit)

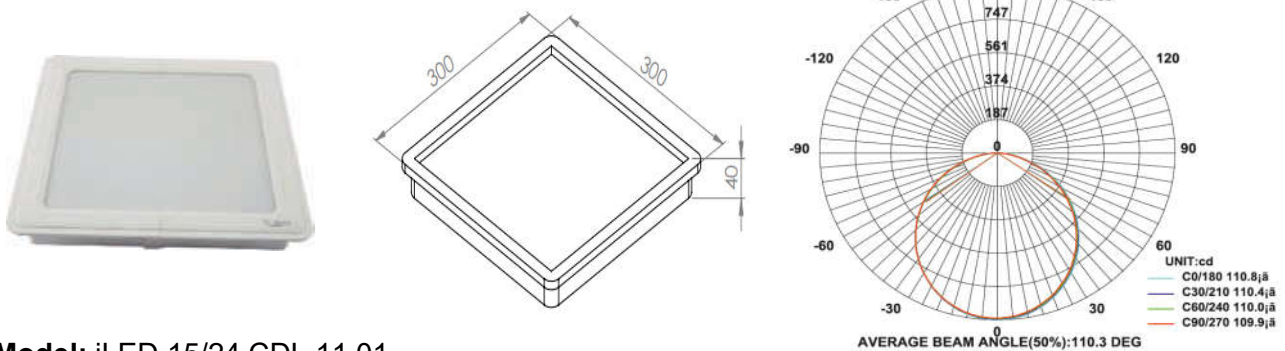

Model: iLED 15/24 CDL 11 01

PRODUCT DESCRIPTION

The recessed mount luminaires are in the range of 15 W and 24 W. Universal power supply/drivers with input range of 90 V to 305 V AC, 50/60 Hz and PF >0.95. The material used is Abs plastic frame with PMMA high transitive milky diffuser & Aluminium back plate. It is ideal for commercial office, showroom, parking, corridors etc.

Different fixture colours available on request.

SPECIFICATION

Material	: Abs plastic Frame with PMMA high transitive milky diffuser & Aluminium back plate
Lumen Efficacy	: 160 – 180 lumens
Mounting	: Recess
Power	: 15/24 W
Voltage	: 90 V to 305 V AC, 50/60 Hz
Power Factor	: >0.95
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W
Dimension	: L-300 X W-300 X H-40 mm
Cut-out Dia	: 275 X 275 X 40 mm
Driver	: External
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 20
Led used	: CREE ⇄
Dimmable Interface	: CASAMBI , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

ORDERING INFORMATION

iLED	15/24	CDL	01	W	WW	NW
Brand name	Rated Power	Ceiling down Light	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in

iLED Lighting Systems Pvt Ltd
Chennai, Tamil Nadu, India 600096