


Stage Light with DMX Controller

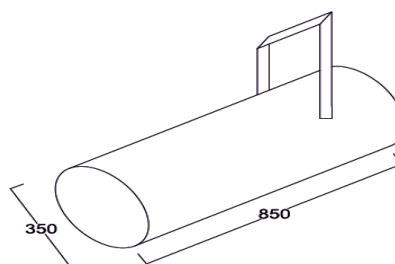

Model: iLED 180 TH 337-LED Profile Spot Light

PRODUCT DESCRIPTION

The stage luminaires are in the range of 120W, 150 W, 160W and 180 W. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95. The material used is ABS engineering plastic with aluminum heat sink with polished reflector and tempered glass. It is ideal to wall wash buildings, clubs, hotels, stages, parks, plazas etc.

Different fixture colours available on request.

SPECIFICATION

Material	: ABS engineering plastic with aluminum heat sink with PMMA lens and tempered glass
Lumen Efficacy	: 160 – 180 lumens
Mounting	: Surface mount using aluminium clamps adjustable
Power	: 180 W
Voltage	: 90 V to 305 V AC 50/60 Hz
Power Factor	: >0.95
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K RGB
Lumen Flux	: 120-140 lm/W
Dimension	: D-350 X H-850 mm
Driver	: Internal
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 20
Led used	: CREE ⇄
Dimmable Interface	: CASAMBI , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

ORDERING INFORMATION

iLED	180	TH	04	W	WW	NW	RGB
Brand name	Rated Power	Stage Light	Model No.	White	Warm White	Neutral White	Red Green Blue

The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in

iLED Lighting Systems Pvt Ltd
Chennai, Tamil Nadu, India 600096