
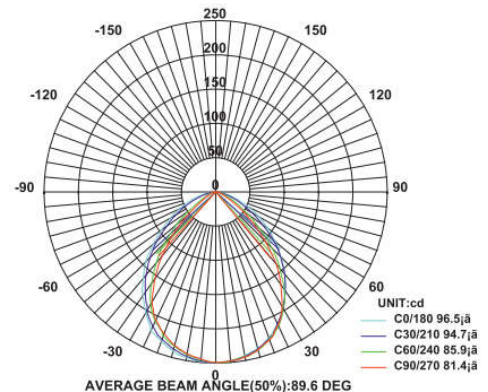


Wall Lights Outdoor



Model: iLED 1/3 WDL 44

PRODUCT DESCRIPTION

The wall luminaire is made of die cast aluminium. It is available in 1 W and 3 W. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.96. It is ideal for outdoor, passages, corridors etc.

Different fixture colours available on request.

SPECIFICATION

Material	: Aluminum die cast with powder coated
Mounting	: In wall
Power	: 1/3 W
Voltage	: 90 – 305 V AC 50/60 Hz
Power Factor	: >0.96
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W (lumen efficacy: 160 -180 lm)
Dimension	: L-75 X W-60 X H-60 mm
Driver	: Internal/External
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 33/65
Led used	: CREE ⇄
Dimmable Interface	: CASAMBI , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

ORDERING INFORMATION

iLED	1/3	WDL	44	W	WW	NW
Brand name	Rated Power	Wall Light	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in

iLED Lighting Systems Pvt Ltd
Chennai, Tamil Nadu, India 600096