
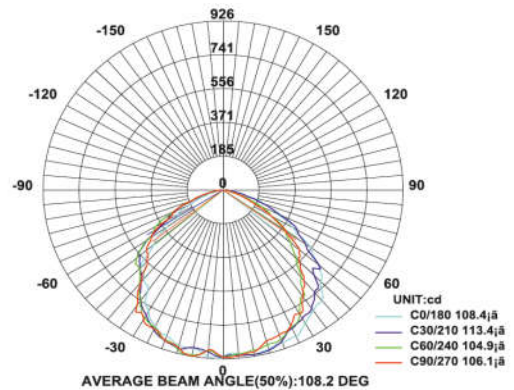


Street Lights

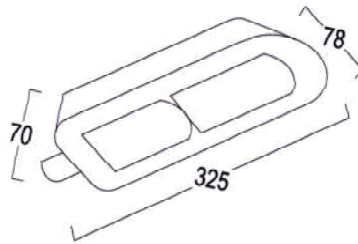

Model: iLED 20,30,45,60,90 ST 02

PRODUCT DESCRIPTION

The Street luminaire are in the range of 14 W, 20 W, 30 W, 36W, 40W,45 W, 60 W, 72W, 80 W, 90W. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95. The material used is Powder coated aluminum die casting with PMMA lens and tempered glass. It is ideal for street/road, pathway, garden, stadium, etc.

Different fixture colours available on request.

SPECIFICATION

Material	: Powder coated aluminum die casting with PMMA lens and tempered glass
Mounting	: Aluminum / GI pole
Lumen Efficacy	: 160 – 180 lumens
Power	: 20/25W
Voltage	: 90 V to 305 V AC 50/60 Hz
Power Factor	: >0.95
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W
Dimension	: L-78 X H-325 X W-70 mm
Pole	: 3 metre
Driver	: Internal
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 65/67
Led used	: CREE ⇄
Dimmable Interface	: CASAMBI , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

ORDERING INFORMATION

iLED	20/25	ST	02	W	WW	NW
Brand name	Rated Power			White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in

iLED Lighting Systems Pvt Ltd
Chennai, Tamil Nadu, India 600096