
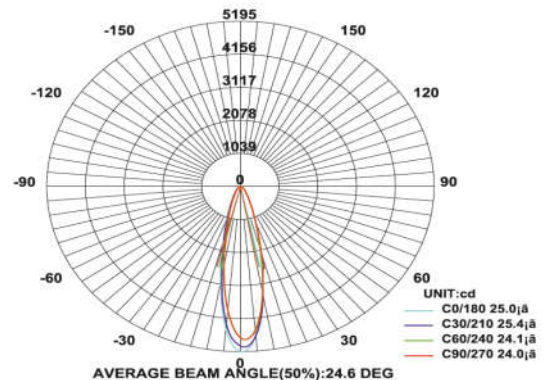


## Jewellery & Showcase Display Light

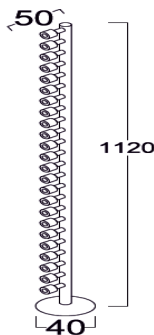

**Model:** iLED 24 JL 06

### PRODUCT DESCRIPTION

The Jewellery & Showcase Display Light is in the range of 24 W. And can be customised to required wattage & height. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95 are provided. The material used is Aluminum with adjustable head & PMMA optics . It is ideal Vertical rack of multishelf to focus the jewellery, showcase, rooms, readings etc.

*Different fixture colours available on request.*

### SPECIFICATION

Material	: Aluminum with adjustable head & PMMA optics
Lumen Efficacy	: 160 – 180 lumens
Mounting	: Surface mount
Power	: 24W
Voltage	: 90 V to 305 V AC 50/60 Hz
Power Factor	: >0.95
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W
Dimension	: D-40 X W- 50 X H-1120 mm H-313mm
Driver	: External
Operating Temp	: -40°C ~ + 70°C
CRI	: >85
IP Rating	: IP 20
Led used	: <b>CREE</b> ⇄
Dimmable Interface	: <b>CASAMBI</b> , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

### ORDERING INFORMATION

iLED	24	JL	06	W	WW	NW
Brand name	Rated Power	Jewel Light	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

\*Logos of products and companies are used for reference

www.iled.in

iLED Lighting Systems Pvt Ltd  
Chennai, Tamil Nadu, India 600096