
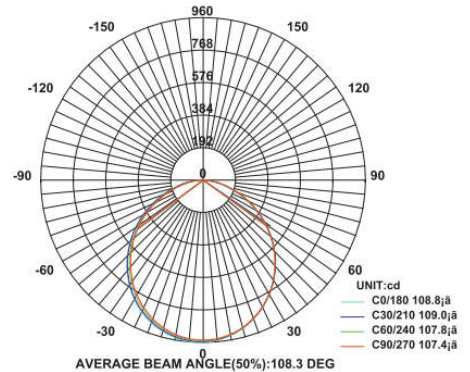


Panel Down Lights Milky (Back Lit)

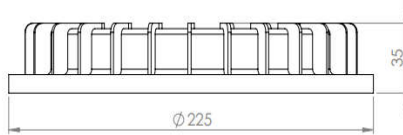

Model: iLED 24 PDL 03

PRODUCT DESCRIPTION

The Back lit panel down luminaire is made of aluminium housing with PMMA high transitive milky diffuser and depending on the fixture size it is available in the range of 24 W. Universal power supply/drivers with input range of 90 V to 270 V AC, 50/60 Hz and PF >0.96. It is ideal for hotel, showroom, home, office, theatres, auditorium, etc.

Different fixture colours available on request.

SPECIFICATION

Material	: Powder coated aluminium housing with PMMA high transitive milky diffuser
Mounting	: Recessed mount
Power	: 24 W
Voltage	: 90 – 270 V AC 50/60 Hz
Power Factor	: >0.96
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W (lumen efficacy: 160 -180 lm)
Dimension	: D-225 X H-35 mm D-200mm
Cut-out diameter	: 200 mm 175mm
Driver	: External
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 20
Led used	: CREE ⇄
Dimmable Interface	: CASAMBI , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

ORDERING INFORMATION

iLED	24	PDL	03	W	WW	NW
Brand name	Rated Power	Panel Down Light	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in

iLED Lighting Systems Pvt Ltd
Chennai, Tamil Nadu, India 600096