
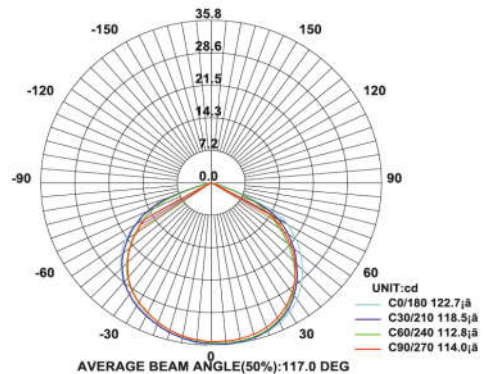


Jewellery & Showcase Display Light



Model: iLED 3 RJL 03

PRODUCT DESCRIPTION

The Jewellery & Showcase Display Light is in the range of 3 W. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95. The material used is Aluminum with flexible gooseneck/adjustable head & PMMA optics. It is ideal to focus the jewellery, showcase, rooms, readings etc.

Different fixture colours available on request.

SPECIFICATION

| | |
|--------------------|--|
| Material | : Aluminum with flexible gooseneck/adjustable head & PMMA optics |
| Lumen Efficacy | : 160 – 180 lumens |
| Mounting | : Surface mount |
| Power | : 3W |
| Voltage | : 90 V to 305 V AC, 50/60 Hz |
| Power Factor | : >0.95 |
| LED colors | : White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K |
| Lumen Flux | : 120-140 lm/W |
| Dimension | : D-50 X H-326 mm H-335mm |
| Driver | : External |
| Operating Temp | : -40°C ~ + 70°C |
| CRI | : >85 |
| IP Rating | : IP 20 |
| Led used | : CREE ⇄ |
| Dimmable Interface | : CASAMBI , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional) |

ORDERING INFORMATION

| | | | | | | |
|------------|-------------|-------------------|-----------|-------|------------|---------------|
| iLED | 3 | RJL | 03 | W | WW | NW |
| Brand name | Rated Power | Round Jewel Light | Model No. | White | Warm White | Neutral White |

The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in

iLED Lighting Systems Pvt Ltd
Chennai, Tamil Nadu, India 600096