
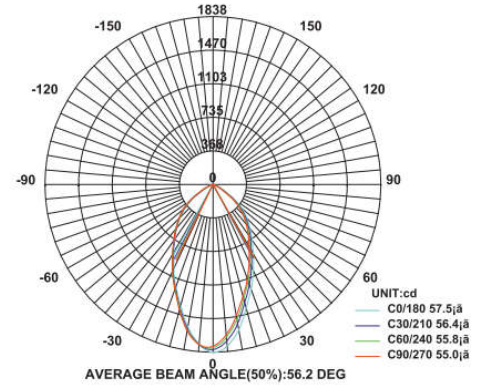


Hi Bay lights

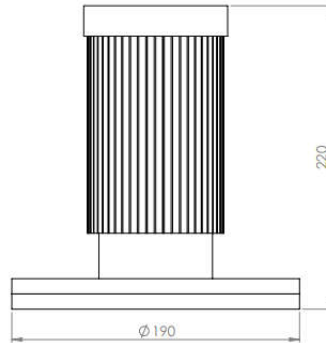

Model: iLED 30 FL Black Eye 001

PRODUCT DESCRIPTION

The hi bay luminaire is made of ventilated aluminium with reflective hood / tempered glass and milky diffuser. depending on the fixture size it is available in the range from 30 W to 200 W. Universal power supply/drivers with input range of 85 V to 270 V AC, 50/60 Hz and PF >0.96. It is ideal for factory, warehouse, yard, super market, conventional centre, etc. *Different fixture colours available on request.*

SPECIFICATION

| | |
|--------------------|--|
| Material | : Ventilated aluminium with reflective hood & tempered glass |
| Mounting | : Suspended/Angular mounting |
| Power | : 30 W |
| Voltage | : 85 – 270 V AC 50/60 Hz |
| Power Factor | : >0.96 |
| LED colors | : White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K |
| Lumen Flux | : 120-140 lm/W (lumen efficacy: 160 -180 lm) |
| Dimension | : D-190 X H-220 mm (with clamp H-250) |
| Driver | : External |
| Operating Temp | : -40°C ~ + 70°C |
| CRI | : 85 |
| IP Rating | : IP 67 |
| Led used | : CREE ⇄ |
| Dimmable Interface | : CASAMBI , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional) |

ORDERING INFORMATION

| | | | | | | |
|------------|-------------|-------------|-----------|-------|------------|---------------|
| iLED | 30 | FL | 001 | W | WW | NW |
| Brand name | Rated Power | Flood Light | Model No. | White | Warm White | Neutral White |

The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in

iLED Lighting Systems Pvt Ltd
Chennai, Tamil Nadu, India 600096