
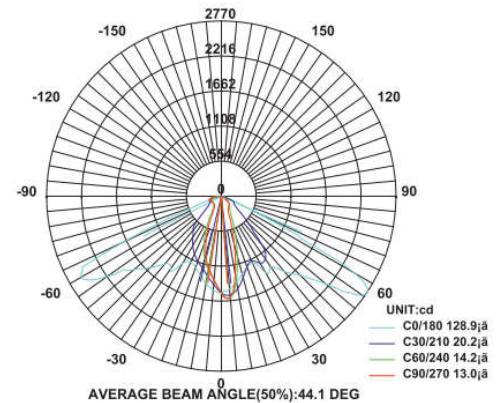


## Wall Lights Outdoor



**Model:** iLED 30 WL OD 43

### PRODUCT DESCRIPTION


The wall luminaire is made of die cast aluminium. It is available in 30 W. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.96. It is ideal for outdoor, passages, corridors etc.

*Different fixture colours available on request.*

### SPECIFICATION

|                    |  |
|--------------------|--|
| Material           | : Ventilated powder coated die cast aluminium with wide beam lens  |
| Mounting           | : Wall mount   |
| Power              | : 30 W   |
| Voltage            | : 90 – 305 V AC 50/60 Hz   |
| Power Factor       | : >0.96  |
| LED colors         | : White 6000-6400 K<br>Neutral White 4000-4500 K<br>Warm White 2700-3000 K                                   |
| Lumen Flux         | : 120-140 lm/W (lumen efficacy: 160 -180 lm)   |
| Dimension          | : L-182 X W-140 X H-42 mm  |
| Driver             | : Internal   |
| Operating Temp     | : -40°C ~ + 70°C   |
| CRI                | : 85   |
| IP Rating          | : IP 65  |
| Led used           | : <b>CREE</b> ⇄  |
| Dimmable Interface | : <b>CASAMBI</b> , Colour tunable (2700 K – 6000 K),<br>DALI, Edge pulse/0/1-10 V dimming control (optional) |

### BEAM ANGLE

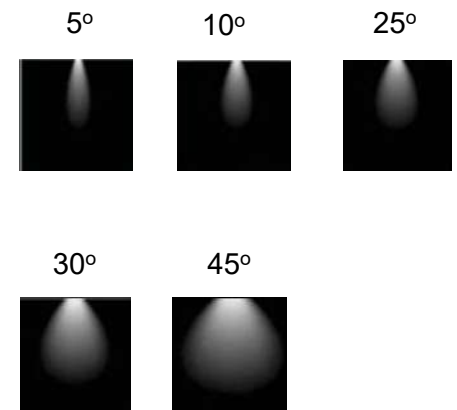

### ORDERING INFORMATION

|            |             |            |         |           |       |            |               |
|------------|-------------|------------|---------|-----------|-------|------------|---------------|
| iLED       | 30          | WL         | OD      | 43        | W     | WW         | NW            |
| Brand name | Rated Power | Wall Light | Outdoor | Model No. | White | Warm White | Neutral White |

The technical specifications may vary due to continuous improvement without prior notice.

\*Logos of products and companies are used for reference

[www.iled.in](http://www.iled.in)

iLED Lighting Systems Pvt Ltd  
Chennai, Tamil Nadu, India 600096