
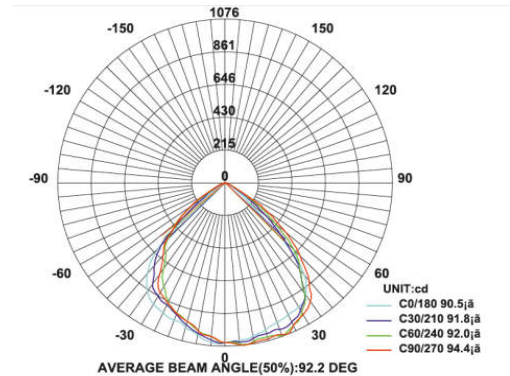


Garden Lights /wall light IP65

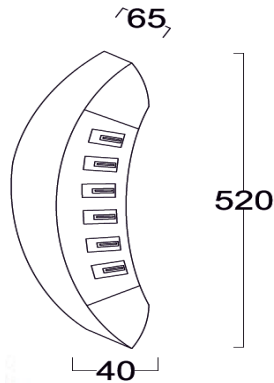

Model: iLED 30/40 GL 06

PRODUCT DESCRIPTION

The garden luminaire is made of die cast aluminium with clear diffuser and it is available in 30 W and 40 W. Universal power supply/drivers with input range of 90 V to 270 V AC 50/60 Hz and PF >0.96. It is ideal for garden, gate lights etc.

Different fixture colours available on request.

SPECIFICATION

Material	: Ventilated powder coated aluminum with reflector & clear diffuser
Mounting	: Wall mount
Power	: 30/40 W
Voltage	: 90 – 270 V AC 50/60 Hz
Power Factor	: >0.96
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W (lumen efficacy: 160 -180 lm)
Dimension	: L-520 X W-80 X H-62 mm
Driver	: External
Operating Temp	: -40°C ~ + 70°C
CRI	: >85
IP Rating	: IP 65
Led used	: CREE ⇄
Dimmable Interface	: CASAMBI , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

ORDERING INFORMATION

iLED	30/40	GL	06	W	WW	NW
Brand Name	Rated Power	Garden Light	Model No.	White	Warm White	Neutral White