
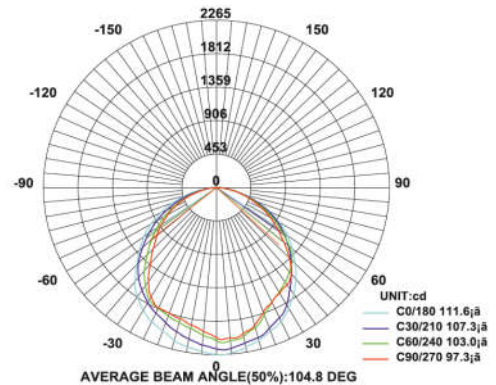


## Ceiling Down Lights

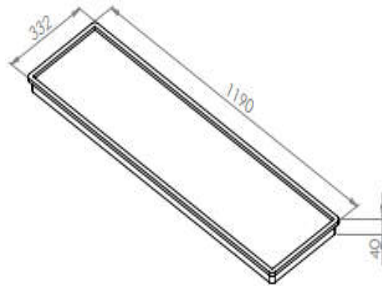

**Model:** iLED 40 CDL 14 03

### PRODUCT DESCRIPTION

The recessed mount luminaires are in the range of 40 W & 60W. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95. The material used is Sheet metal with PMMA high transitive milky diffuser. It is ideal for commercial office, showroom, parking, corridors etc.

*Different fixture colours available on request.*

### SPECIFICATION

Material	: Sheet metal with PMMA high transitive milky diffuser
Lumen Efficacy	: 160 – 180 lumens
Mounting	: Recess
Power	: 40 W & 60W
Voltage	: 90 V to 305 V AC 50/60 Hz
Power Factor	: >0.95
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W
Dimension	: L-1190 X W-332 X H-40 mm
Cut-out Dia	: 1162 X 304 mm
Driver	: External/internal(optional)
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 20
Led used	: <b>CREE</b> ⇄
Dimmable Interface	: <b>CASAMBI</b> , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

### ORDERING INFORMATION

iLED	40	CDL	03	W	WW	NW
Brand name	Rated Power	Ceiling down Light	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

\*Logos of products and companies are used for reference

[www.iled.in](http://www.iled.in)

iLED Lighting Systems Pvt Ltd  
Chennai, Tamil Nadu, India 600096