
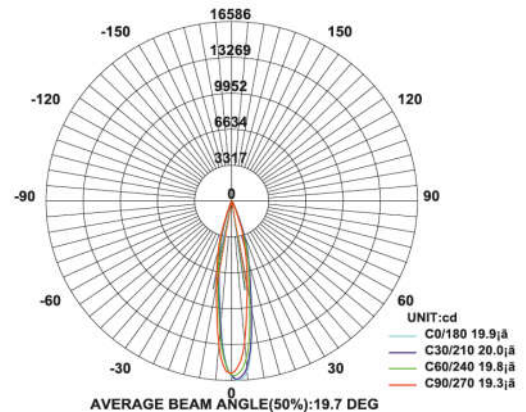


## Facade/Projection Lights



**Model:** iLED 40 OL 04

### PRODUCT DESCRIPTION


The Facade/Projection luminaires are in the range of 40W. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95. The material used is Ventilated powder coated die cast aluminum with tempered glass & reflector. It is ideal for sign, Building facade, accent, general security lighting etc.

*Different fixture colours available on request. The light can travel up to 20+ floors*

### SPECIFICATION

Material	: Ventilated powder coated die cast aluminum with tempered glass & reflector
Lumen Efficacy	: 160 – 180 lumens
Mounting	: Surface mount
Power	: 40 W
Voltage	: 90 V to 305 V AC 50/60 Hz
Power Factor	: >0.95
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W
Dimension	: L-280 X W-130 X H-300 mm
Driver	: Internal
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 67
Led used	: <b>CREE</b>
Dimmable Interface	: <b>CASAMBI</b> , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

### BEAM ANGLE

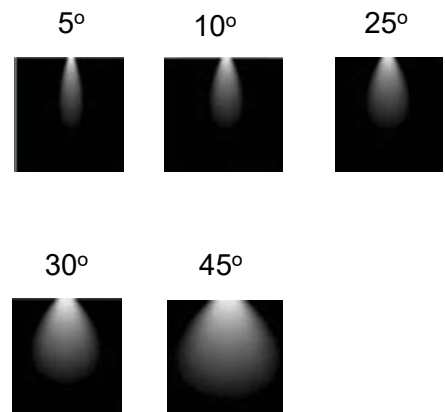

## VARIANTS

MODEL	RATED POWER	DIMENSION
iLED 50 OL 05	50 W	L-280 X W-130 X H-300 mm

## ORDERING INFORMATION

iLED	40	OL	04	W	WW	NW
Brand name	Rated Power	Outdoor Light	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

\*Logos of products and companies are used for reference

[www.iled.in](http://www.iled.in)

iLED Lighting Systems Pvt Ltd  
Chennai, Tamil Nadu, India 600096