


Cupboard Light

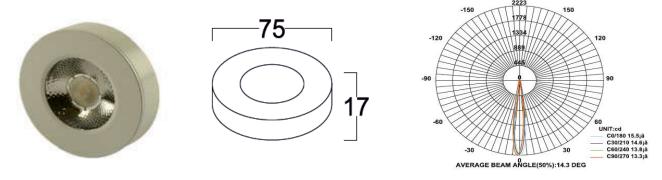

Model: iLED 5 CBL 01


PRODUCT DESCRIPTION

The cupboard luminaire is made of aluminium with clear/ frost lens available in 5 W. Universal power supply/drivers with input range of 12/24 V DC & 90 V to 270 V AC 50/60 Hz and PF >0.96. It is ideal for cupboard and kitchen cabinet etc. *Different fixture colours available on request.*


SPECIFICATION

Material	: Ventilated powder coated aluminum with clear/frost lens	5°
Mounting	: Surface mount	
Power	: 5 W	
Voltage	: 12/24 V DC & 90 – 270 V AC 50/60 Hz	
Power Factor	: >0.96	
LED colors	: White 6000-6400 K	
	Neutral White 4000-4500 K	
	Warm White 2700-3000 K	
Lumen Flux	: 120-140 lm/W (lumen efficacy: 160 -180 lm)	
Dimension	: D-75 X H-17 mm	
Driver	: Internal / External	
Operating Temp	: -40°C ~ + 70°C	
CRI	: 85	
IP Rating	: IP 20	
Led used	CREE ≑	
Dimmable Interface	CASAMBI, Colour tunable (2700 K – 6000 K)	, DALI,
	Edge pulse/0/1-10 V dimming control (optional	al)

BEAM ANGLE



ORDERING INFORMATION



The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in iLED Lighting Systems Pvt Ltd Chennai, Tamil Nadu, India 600096