
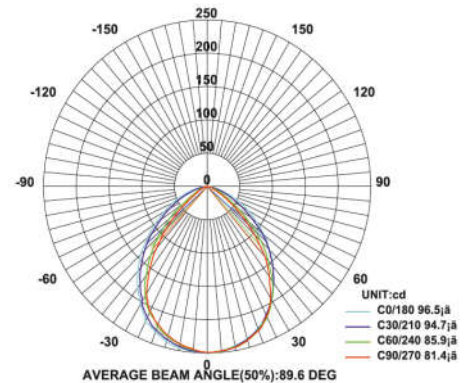


## In wall Lights Outdoor



**Model:** iLED 6 IWL CED 05-IP 65

### PRODUCT DESCRIPTION

The recessed mount wall luminaire is made of aluminium die cast with powder coated and glass depending on the fixture size it is available in the range of 6w. Universal power supply/drivers with input range of 90 V to 270 V AC 50/60 Hz and PF >0.96. It is ideal for outdoor, passages, corridors etc.

*Different fixture colours available on request.*

### SPECIFICATION

Material	: Aluminum die cast with powder coated and glass
Mounting	: In wall
Power	: 6 W
Voltage	: 90 – 270 V AC, 50/60 Hz
Power Factor	: >0.96
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W (lumen efficacy: 160 -180 lm)
Dimension	: L-115 X W-85 X H-52mm
Cut out dimension	:L-110 X W-70 X H-50mm
Driver	: Internal
Cut out	
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 65
Led used	: <b>CREE</b>
Dimmable Interface	: <b>CASAMBI</b> , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

### ORDERING INFORMATION

<b>iLED</b>	<b>6</b>	<b>IWL</b>	<b>05</b>	<b>W</b>	<b>WW</b>	<b>NW</b>
Brand name	Rated Power	In Wall Light	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

\*Logos of products and companies are used for reference

[www.iled.in](http://www.iled.in)

iLED Lighting Systems Pvt Ltd  
Chennai, Tamil Nadu, India 600096