
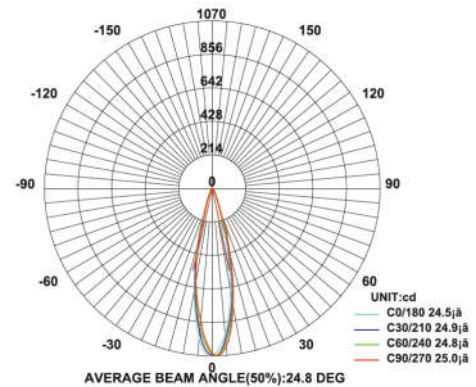


Spots Lights & Retrofits



Model: iLED 6 MR16 03

PRODUCT DESCRIPTION


The Spot Light & Retrofit luminaires are in the range of 4 W, 5 W, 6 W and 8W. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95. The material used is Ventilated aluminum cooling with special reflector & glass. It is ideal for hotel, showroom, home, office, theatres, auditorium, etc.

Different fixture colours available on request.

SPECIFICATION

Material	: Ventilated aluminum cooling with special Reflector & glass
Lumen Efficacy	: 160 – 180 lumens
Mounting	: Retrofit E27/B22/GU 10/E14 / External power supply
Power	: 4-8 W
Voltage	: 90 V to 305 V AC 50/60 Hz
Power Factor	: >0.95
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W
Dimension	: D-49 X H-55 mm
Driver	: Internal
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 20
Angle	: 5°, 10°, 25°, 30°, 45°
Led used	: CREE ⇄
Dimmable Interface	: CASAMBI , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

BEAM ANGLE

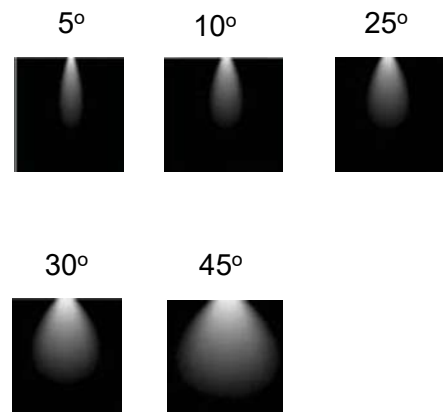

VARIANTS

MODEL	RATED POWER	DIMENSION
iLED 8 MR16 04	8 W	D-49 X H-70 mm

ORDERING INFORMATION

iLED	6	MR	03	W	WW	NW
Brand name	Rated Power	Multi facated Reflector	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in

iLED Lighting Systems Pvt Ltd
Chennai, Tamil Nadu, India 600096