
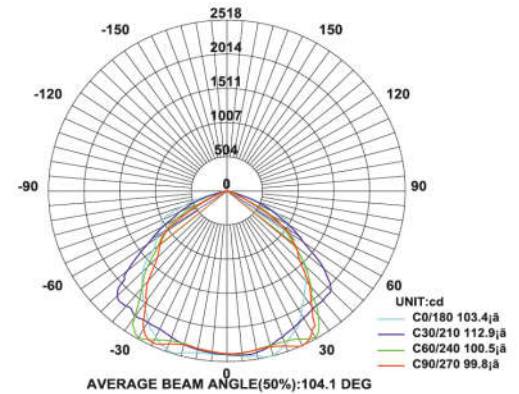


## Street Lights

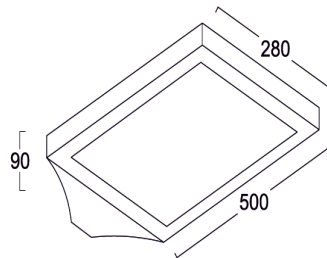

**Model:** iLED 60 ST 04

### PRODUCT DESCRIPTION

The Street luminaire are in the range of 14 W, 20 W, 30 W, 36W, 40W,45 W, 60 W /72W. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95. The material used is Ventilated aluminum Extrusion with aluminum casting, reflector, PMMA lens(Optional) . It is ideal for street/road, pathway, garden, stadium, etc. *Different fixture colours available on request.*

### SPECIFICATION

Material	: Ventilated aluminum Extrusion with aluminum casting, reflector, PMMA lens (Optional)
Lumen Efficacy	: 160 – 180 lumens
Mounting	: Aluminium / GI pole
Power	: 60 /72W
Voltage	: 90 V to 305 V AC 50/60 Hz
Power Factor	: >0.95
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W
Dimension	: L-500 X H-90 X W-280 mm
Pole	: 6 metre
Driver	: Internal
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 65/67
Led used	: <b>CREE</b> ⇄
Dimmable Interface	: <b>CASAMBI</b> , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

### ORDERING INFORMATION

iLED	60	ST	04	W	WW	NW
Brand name	Rated Power	Street Light	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

\*Logos of products and companies are used for reference

[www.iled.in](http://www.iled.in)

iLED Lighting Systems Pvt Ltd  
Chennai, Tamil Nadu, India 600096