
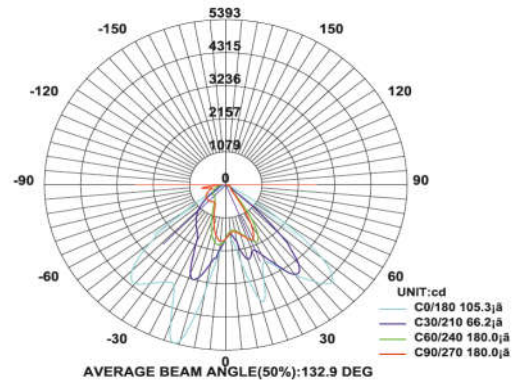


## Street Lights

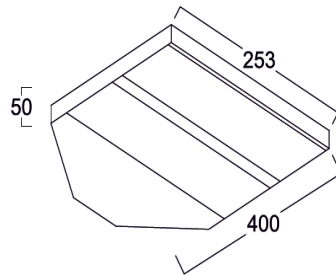

**Model:** iLED 72 ST 1712

### PRODUCT DESCRIPTION

The Street luminaire are in the range of 36W, 72W, 108W and 144 W. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95 . The material used is Ventilated powder coated aluminum with wide aero angle lens. It is ideal for street/road, pathway, garden, stadium, etc.

*Different fixture colours available on request.*

### SPECIFICATION

Material	: Ventilated powder coated aluminum with wide aero angle lens
Lumen Efficacy	: 160 – 180 lumens
Mounting	: Aluminium / GI pole
Power	: 72 W
Voltage	: 90 V to 305 V AC 50/60 Hz
Power Factor	: >0.95
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W
Dimension	: L-400 X H-50 X W-253 mm
Angle	: 80o/145o
Driver	: Surge 10 KVA (external)
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 65/67
Led used	: <b>CREE</b> ⇄
Dimmable Interface	: <b>CASAMBI</b> , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

### ORDERING INFORMATION

iLED	72	ST	1712	W	WW	NW
Brand name	Rated Power	Street Light	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

\*Logos of products and companies are used for reference

[www.iled.in](http://www.iled.in)

iLED Lighting Systems Pvt Ltd  
Chennai, Tamil Nadu, India 600096