
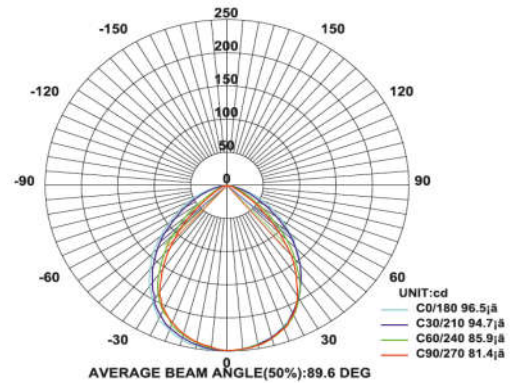


## Mirror/Picture Lights

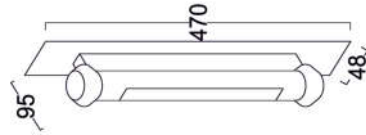

**Model:** iLED 8 ML 03

### PRODUCT DESCRIPTION

The Mirror/Picture luminaire is in the range of 8 W. Universal power supply/drivers with input range of 90 V to 305 V AC, 50/60 Hz and PF >0.95. The material used is stainless steel with milky diffuser. It can be used above the mirror/picture.  
*Different fixture colours available on request.*

### SPECIFICATION

Material	: stainless steel with milky diffuser
Lumen Efficacy	: 160 – 180 lumens
Mounting	: Surface mount
Power	: 8W
Voltage	: 90 V to 305 V AC, 50/60 Hz
Power Factor	: >0.95
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W
Dimension	: L-470 X W-95 X H-48mm
Driver	: Internal
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
Led used	: <b>CREE</b> ⇄
Dimmable Interface	: <b>CASAMBI</b> , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

### ORDERING INFORMATION

<b>iLED</b>	<b>8</b>	<b>ML</b>	<b>03</b>	<b>W</b>	<b>WW</b>	<b>NW</b>
Brand name	Rated Power	Mirror Light	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

\*Logos of products and companies are used for reference

[www.iled.in](http://www.iled.in)

iLED Lighting Systems Pvt Ltd  
Chennai, Tamil Nadu, India 600096