
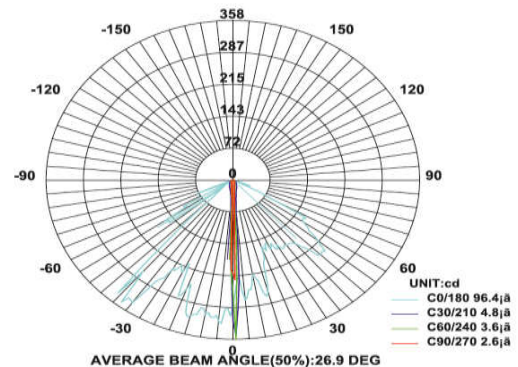


## Window Sill / Ray Light-OUTDOOR



**Model:** iLED 8 RL RM 02, iLED 12 RL SM OD 02

### PRODUCT DESCRIPTION

The ray light luminaire is made of die cast aluminium with ray lens and it is available in 8 W and 12 W. Universal power supply/drivers with input range of 90 V to 270 V AC 50/60 Hz and PF >0.96. It is ideal for Hotel, showroom, Home, Offices, Theaters etc.  
*Different fixture colours available on request.*

### SPECIFICATION

Material	: Ventilated powder coated die cast Aluminum with Ray lens
Mounting	: Surface mount
Power	: 8 W, 12 W
Voltage	: 90 – 270 V AC 50/60 Hz
Power Factor	: >0.96
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W (lumen efficacy: 160 -180 lm)
Dimension	: L-147 X W-60 X H-100 mm, L-147 X W-60 X H-100 mm
Driver	: Internal
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 66
Led used	: <b>CREE</b> ⇄
Dimmable Interface	: <b>CASAMBI</b> , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

### ORDERING INFORMATION

iLED	8	RL	02	W	WW	NW
Brand name	Rated Power	Ray Light	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

\*Logos of products and companies are used for reference

[www.iled.in](http://www.iled.in)

iLED Lighting Systems Pvt Ltd  
 Chennai, Tamil Nadu, India 600096