


Surface Mount Down Lights

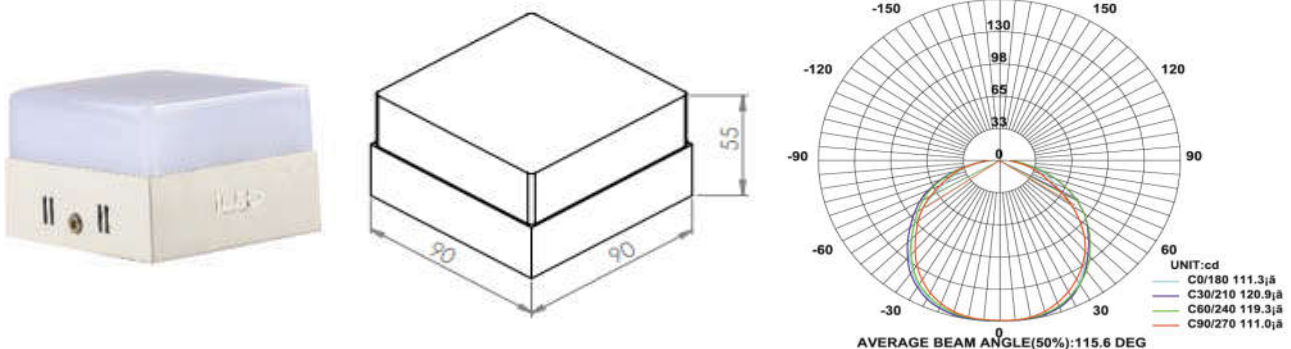

Model: iLED 8 SM SDL 10, iLED 20 SM SDL 11

PRODUCT DESCRIPTION

This surface mount **BACK LIT** luminaire is in the range of 8W - 20W. Universal power supply/drivers with input range of 90 V to 305 VAC 50/60 Hz and PF >0.95. The material used is ventilated aluminum die cast with high transitive milky diffuser. It is ideal for hotel, showroom, home, office, auditorium etc.

SPECIFICATION

| | |
|--------------------|--|
| Material | : Ventilated aluminum die cast with high transitive milky diffuser |
| Lumen Efficacy | : 160 – 180 lumens |
| Mounting | : Surface mount |
| Power | : 8 W - 20 W |
| Voltage | : 90 – 305 VAC 50/60 Hz |
| Power Factor | : >0.95 |
| LED colors | : White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K |
| Lumen Flux | : 120-140 lm/W |
| Light angle | : 5°, 10°, 15°, 25°, 30°, 45° & 60° |
| Dimension | : L-90 X W-90 X H-55 mm, L-180 X W-180 X H-55 mm |
| Driver | : Internal |
| Operating Temp | : -40°C ~ + 70°C |
| CRI | : >85 |
| IP Rating | : IP 67 |
| Led used | : CREE ⇄ |
| Dimmable Interface | : CASAMBI , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional) |

ORDERING INFORMATION

| | | | | | | |
|------------|-------------|---------------------------------|-----------|-------|------------|---------------|
| iLED | 8 | SM SDL | 10 | W | WW | NW |
| Brand name | Rated Power | Surface Mount Square Down Light | Model No. | White | Warm White | Neutral White |

The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in

iLED Lighting Systems Pvt Ltd
Chennai, Tamil Nadu, India 600096