
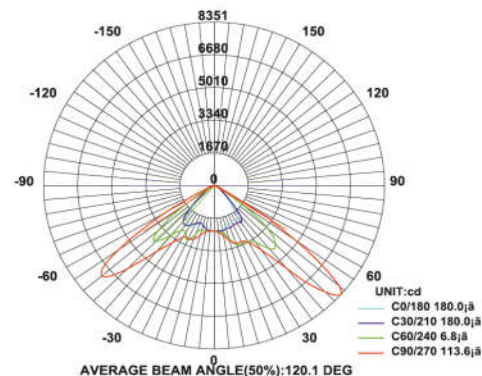


Street Lights

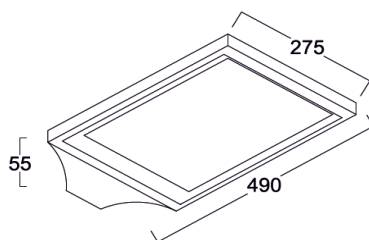

Model: iLED 80 ST 06

PRODUCT DESCRIPTION

The Street luminaire are in the range of 14 W, 20 W, 30 W, 36W, 40W, 45 W, 60 W, 72W, 90W 90 W. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95 are provided. The material used is Ventilated aluminum Extrusion with aluminum casting, reflector, PMMA lens(Optional). It is ideal for street/road, pathway, garden, stadium, etc.

Different fixture colours available on request.

SPECIFICATION

Material	: Ventilated aluminum Extrusion with aluminum casting, reflector, PMMA lens(Optional)
Lumen Efficacy	: 160 – 180 lumens
Mounting	: Aluminium / GI pole
Power	: 90 W
Voltage	: 90 V to 305 V AC 50/60 Hz
Power Factor	: >0.95
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W
Dimension	: L-490 X H-55 X W-275 mm
Pole	: 7.5 metres
Driver	: Internal
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 65/67
Led used	: CREE
Dimmable Interface	: CASAMBI , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

ORDERING INFORMATION

iLED	80	ST	06	W	WW	NW
Brand name	Rated Power	Street Light	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in

iLED Lighting Systems Pvt Ltd
Chennai, Tamil Nadu, India 600096