
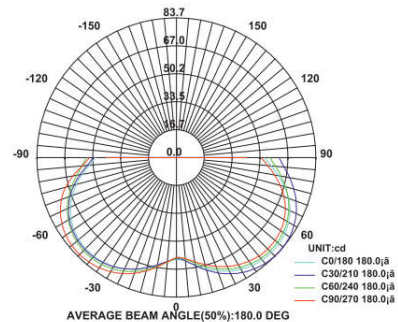


## Wall Lights Outdoor



**Model:** iLED CWL OD 06

### PRODUCT DESCRIPTION

The wall luminaire is made of die cast aluminium. It is available in the range of 3 W to 12 W. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.96. It is ideal for wall decorative, gate lights, etc. *Different fixture colours available on request.*

### SPECIFICATION

Material	: Aluminum Die Casting Graphite Black Finish
Mounting	: Surface Mount
Power	: 3 W to 12 W
Voltage	: 90 – 305 V AC 50/60 Hz
Power Factor	: >0.96
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W (lumen efficacy: 160 -180 lm)
Dimension	: D-180 X H-250 mm
Driver	: Internal
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 65
Led used	: <b>CREE</b> ⇄
Dimmable Interface	: <b>CASAMBI</b> , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

### ORDERING INFORMATION

<b>iLED</b>	<b>3/1</b> <b>2</b>	<b>CWL</b>	<b>OD</b>	<b>06</b>	<b>W</b>	<b>WW</b>	<b>NW</b>
Brand name	Rated Power	Compound Wall Light	Outdoor	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

\*Logos of products and companies are used for reference

[www.iled.in](http://www.iled.in)

iLED Lighting Systems Pvt Ltd  
Chennai, Tamil Nadu, India 600096