


## Front Removable Fitting Frame (FR Series)

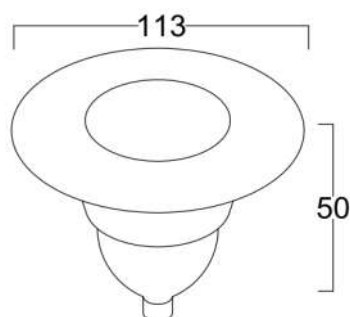

**Model:** ILED RRF X 001– FR SERIES

### PRODUCT DESCRIPTION

The FR series Front removable recess mount Luminaire ideal, with out damaging the ceiling are made of aluminium and available in 10 W – 24 W. Universal power supply/drivers with input range of 90 V to 270 V AC 50/60 Hz and PF >0.96. It is ideal for hotel, showroom, office, auditorium & etc. *Different fixture colours available on request.*

### SPECIFICATION

Type	: Non- Adjustable without light source
Material	: Aluminum die casting
Mounting	: Recess mount
Power	: 10 W
Voltage	: 90 – 270 V AC 50/60 Hz
Power Factor	: >0.96
Holder	: MR16
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W (lumen efficacy: 160 -180 lm)
Dimension	: D-82 X H-40 mm
Cut out diameter	: 71 mm
Driver	: External
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 20
Led used	: <b>CREE</b> ⇄
Dimmable Interface	: <b>CAS</b> <b>A</b> <b>M</b> <b>B</b> <b>I</b> , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

### ORDERING INFORMATION

iLED	10	RRF	W	WW	NW
Brand name	Rated Power	Retrofit	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

\*Logos of products and companies are used for reference

[www.iled.in](http://www.iled.in)

iLED Lighting Systems Pvt Ltd  
Chennai, Tamil Nadu, India 600096