
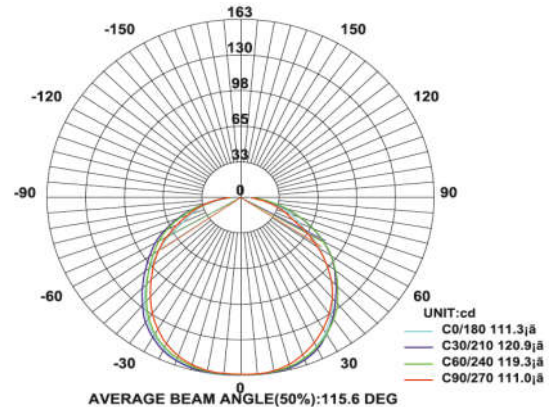



## Surface Mount Down Lights

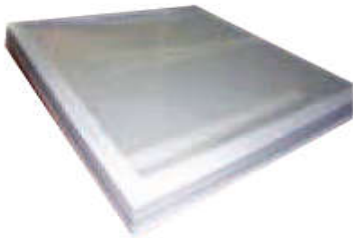

**Model:** iLED SMDL D17 19, iLED SMDL D35 20

### PRODUCT DESCRIPTION

This surface mount luminaire is in the range of 40W, 60W, and 120 W. Universal power supply/drivers with input range of 90 V to 305 VAC 50/60 Hz and PF >0.95. The material used is sheet metal with PMMA high transitive with milky diffuser. It is ideal for commercial office, showroom, parking, corridors etc.

### SPECIFICATION

Material	: Sheet metal with PMMA high transitive with milky diffuser
Lumen Efficacy	: 160 – 180 lumens
Mounting	: Surface mount
Power	: 40/60/120 W
Voltage	: 90 – 305 VAC 50/60 Hz
Power Factor	: >0.95
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W
Light angle	: 5°, 10°, 15°, 25°, 30°, 45° & 60°
Dimension	: L-595 X W-595 X H-17 mm, L-595 X W-595 X H-35 mm
Driver	: Internal
Operating Temp	: -40°C ~ + 70°C
CRI	: >85
IP Rating	: IP 67
Led used	: <b>CREE</b>
Dimmable Interface	: <b>CASAMBI</b> , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

## VARIANTS

MODEL	RATED POWER	DIMENSION
iLED SMDL D35 20	40/60/120 W	L-595 X W-595 X H-35 mm

## ORDERING INFORMATION

iLED	40/60/120	SMDL	19	W	WW	NW
Brand name	Rated Power	Surface Mount Down Light	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

\*Logos of products and companies are used for reference

[www.iled.in](http://www.iled.in)

iLED Lighting Systems Pvt Ltd  
Chennai, Tamil Nadu, India 600096