
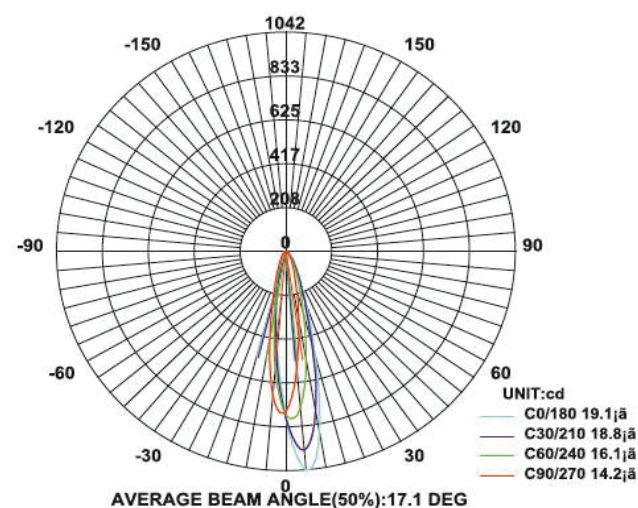


Facade/Projection Lights

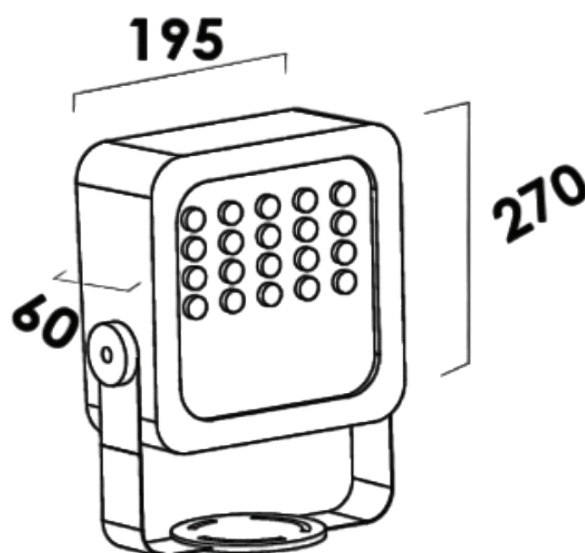

Model : iLED 24-36 OL 12

PRODUCT DESCRIPTION

The Facade/Projection luminaires are in the range of 36w. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95. The material used is Ventilated powder coated die cast aluminum with tempered glass & reflector. It is ideal for sign, Building facade, accent, general security lighting etc.

Different fixture colours available on request.

SPECIFICATION

Material : Ventiled powder coated Die cast Aluminum
with tempered glass & lens

Mounting : Surface Mount

Lumen flux : 4680-3600Lm

Rated Power : 36W

Color : WW/WW/NW

Dimesion : L-195XW-60XH-270mm


IP Rating : IP65

Driver : Internal

Operating Temp : -40°C ~ + 70°C

CRI : 85

BEAM ANGLE

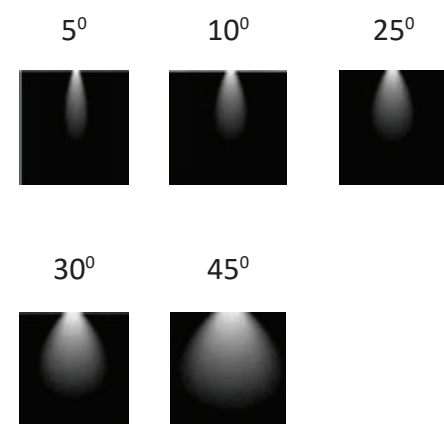

ORDERING INFORMATION

iLED	36	OL	12	W	WW	NW
------	----	----	----	---	----	----

Brand Name

Rated Power

Outdoor Light

Model No.

White

Warm White

Neutral White

www.iled.in

iLED Lighting Systems Pvt Ltd

Chennai, Tamil Nadu, India 600096