
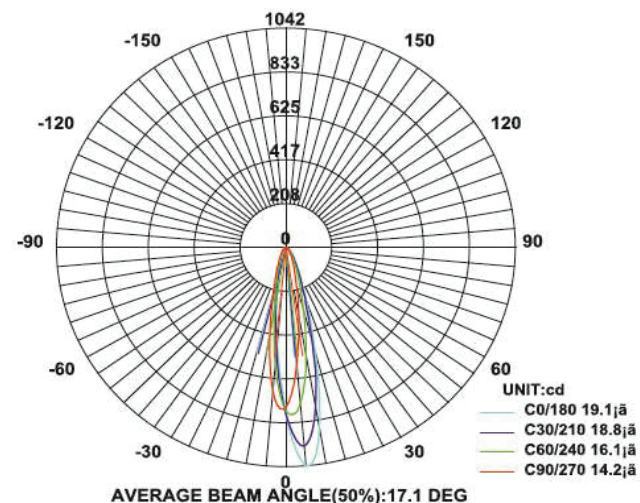
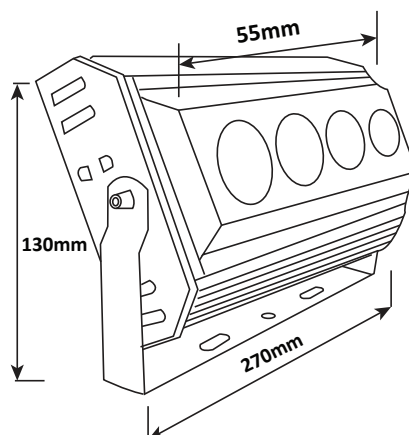


Facade/Projection Lights

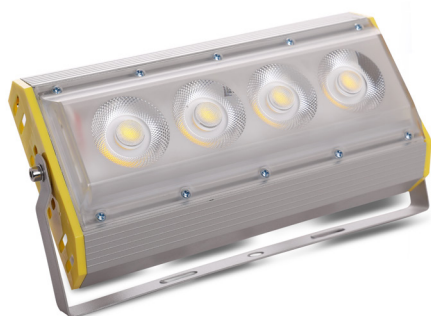

Model : iLED 50 FL 011 WW

PRODUCT DESCRIPTION

The Facade/Projection luminaires are in the range of 35w. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95. The material used is Ventilated powder coated die cast aluminum with tempered glass & reflector. It is ideal for sign, Building facade, accent, general security lighting etc.

Different fixture colours available on request.

SPECIFICATION

Material : Diecast Aluminum & Narrow Beam Lens

Mounting : Surface Mount

Lumen flux : 6000X5000Lm

Rated Power : 35W

Color : WW/

Dimension : W-55xH-130XL-270mm

IP Rating : IP65

Driver : Internal

Operating Temp : -40°C ~ + 70°C


CRI : 80

BEAM ANGLE


5°




10°




25°



30°



45°



ORDERING INFORMATION



Brand Name

Rated Power

Outdoor Light

Model No.

Warm White

www.iled.in

iLED Lighting Systems Pvt Ltd

Chennai, Tamil Nadu, India 600096