


## Facade/Projection Lights

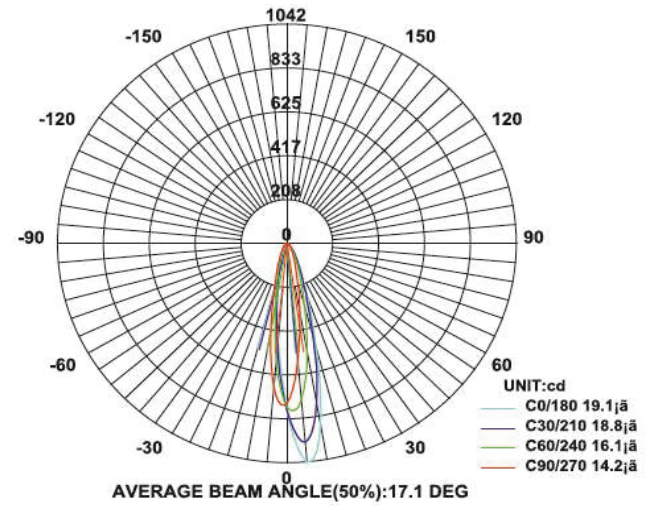

Model : iLED 7-10 OL 13


### PRODUCT DESCRIPTION

The Facade/Projection luminaires are in the range of 7/10W. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95. The material used is Ventilated powder coated die cast aluminum with tempered glass & reflector. It is ideal for sign, Building facade, accent, general security lighting etc. Different fixture colours available on request.

### SPECIFICATION

Material : Ventilated powder coated Die cast Aluminum With tempered glass & lens  
 Mounting : Surface Mount  
 Lumen flux : 910-900 / 1300-1000 Lm  
 Rated Power : 7/10W  
 Color : W/WW/NW  
 Dimension : D-59 X H-87 mm  
 IP Rating : IP65  
 Driver : Internal  
 Operating Temp : -40°C ~ + 70°C  
 CRI : 80

### BEAM ANGLE

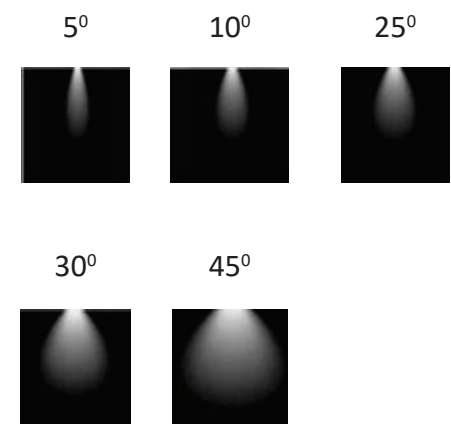

### ORDERING INFORMATION

iLED	7/10	OL	13	W	WW	NW
------	------	----	----	---	----	----

Brand Name	Rated Power	Outdoor Light	Model No.	White	Warm White	Neutral White
------------	-------------	---------------	-----------	-------	------------	---------------