
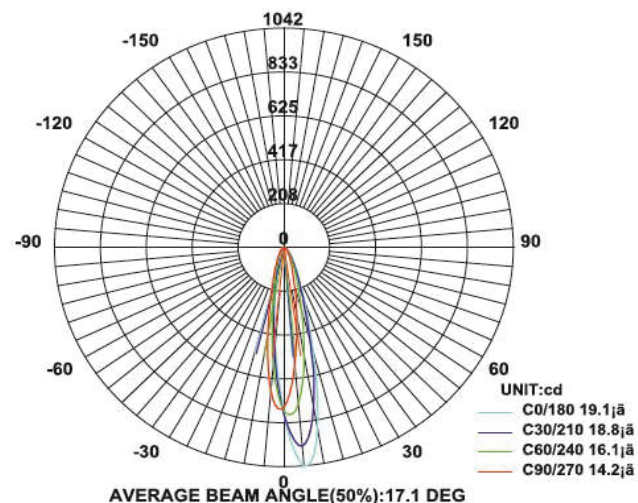


Facade/Projection Lights

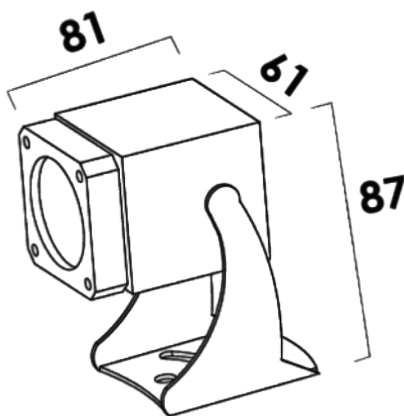

Model : iLED 7-10 OL 16 SQR

PRODUCT DESCRIPTION

The Facade/Projection luminaires are in the range of 7/10w. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95. The material used is Ventilated powder coated die cast aluminum with tempered glass & reflector. It is ideal for sign, Building facade, accent, general security lighting etc.

Different fixture colours available on request.

SPECIFICATION

Material : Ventilated powder coated Die cast Aluminum With tempered glass & lens

Mounting : Surface Mount

Lumen flux : 910-700 / 1300-1000Lm

Rated Power : 7/10W

Color : W/WW/NW

Dimension : L-81 X W-61 X H-87 mm

IP Rating : IP65

Driver : Internal

Operating Temp : -40°C ~ + 70°C


CRI : 80

BEAM ANGLE


5°




10°




25°




30°



45°



ORDERING INFORMATION

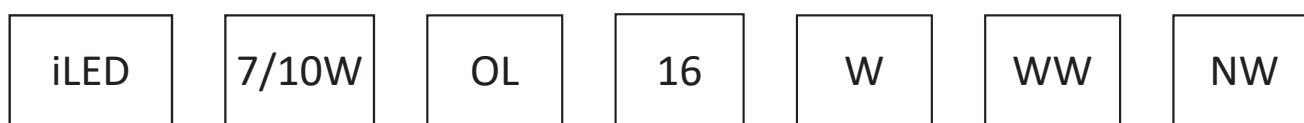

Brand Name

Rated Power

Outdoor Light

Model No.

White

Warm White

Neutral White

www.iled.in

iLED Lighting Systems Pvt Ltd

Chennai, Tamil Nadu, India 600096