
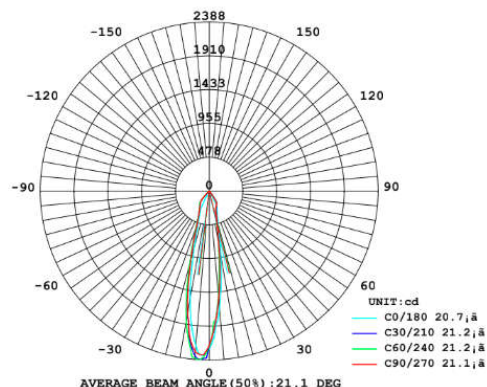


## COB Down Light

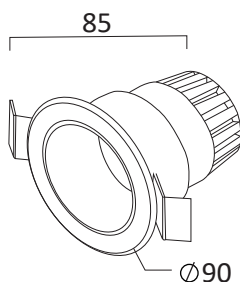

**Model:** iLED 12 RDL COB 330030 - REAR ADJUSTABLE


### PRODUCT DESCRIPTION

The recessed mount luminaire is made of aluminium and depending on the fixture size it is available in the range of 12W Universal powersupply/drivers within put range of 90-280V AC 50/60Hz and PF>0.96. It is ideal for hotel, showroom, home, office, theatres, auditorium, etc. *Different fixture colour savailable on request.*

### SPECIFICATION

Material	: Ventilated Aluminium Cooling With Specialised Lens & Polished Reflector
Mounting	: Recess mount
Power	: 12 WATTS
Voltage	: 90 – 280 V AC 50/60 Hz
Power Factor	: >0.96
LED colors	: WW/NW/W
Lumen Flux	: 1200-1920Lm
Dimension	: D-90 X H-85 mm
Cut-out diameter	: 75 mm
Driver	: External
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
Led used	: <b>CREE</b> ⇄
Dimmable Interface	: <b>CASAMBI</b> , Colour tunable (2700 K – 6000 K), DALI Edge pulse/0/1-10 V dimming control (optional)

### BEAM ANGLE

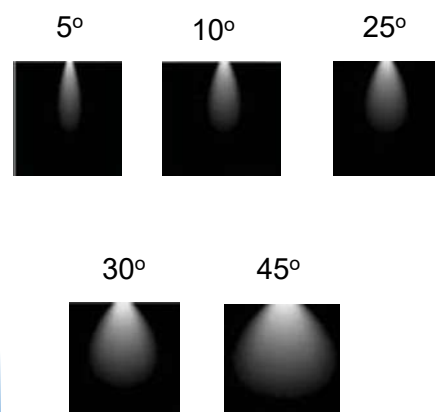

### ORDERING INFORMATION

iLED	12	RDL	COB	330030	W	WW	NW
Brand name	Rated Power	Round Down Light	Chip On Board	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

\*Logos of products and companies are used for reference

[www.iled.in](http://www.iled.in)

iLED Lighting Systems Pvt Ltd  
Chennai, Tamil Nadu, India 600096