


HI BAY LIGHT

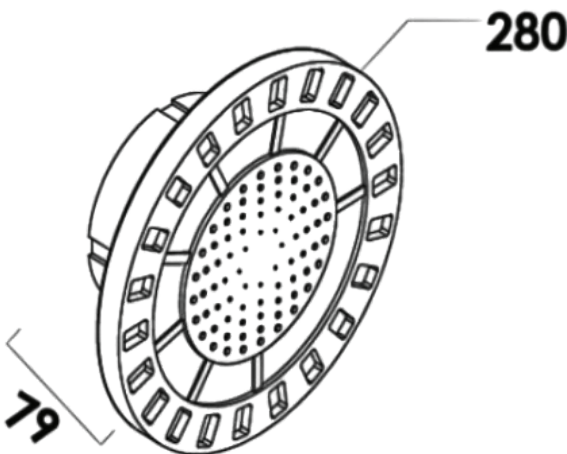

Model : iLED 150 HBL 33006

PRODUCT DESCRIPTION

The Facade/Projection luminaires are in the range of 150W. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95. The material used is Ventilated powder coated die cast aluminum with tempered glass & reflector.It is ideal for sign, Bulding facade, accent, general security lighting etc. Different fixture colours available on request.

SPECIFICATION

Material : Extrusion Aluminum
 Mounting : Suspended / Angular Mounting
 Lumen flux : 19500-15000Lm
 Rated Power : 150W
 Color : WW/WW/NW
 Dimesion : D-280X H-79mm
 IP Rating : IP65
 CRI : >80

ORDERING INFORMATION

iLED	150W	HBL	006	W	WW	NW
Brand Name	Rated Power	Outdoor Light	Model No.	White	Warm White	Neutral White