
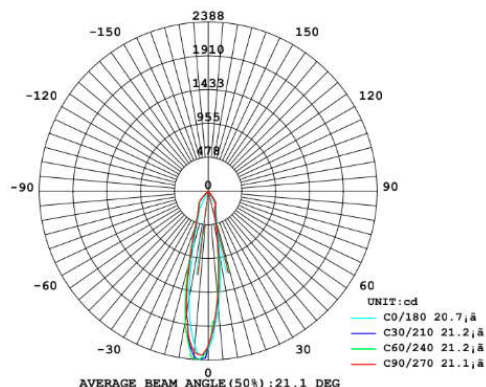


COB Down Light



Model: iLED 18/20 RDL COB 330032 - REAR ADJUSTABLE

PRODUCT DESCRIPTION


The recessed mount luminaire is made of aluminium and depending on the fixture size it is available in the range of 18/20 W Universal powersupply/drivers within put range of 90-280V AC 50/60Hz and PF>0.96. It is ideal for hotel, showroom, home, office, theatres, auditorium,etc.

Different fixture colour savailable on request.

SPECIFICATION

Material	: Ventilated Aluminium Cooling With Specialised Lens & Polished Reflector
Mounting	: Recess mount
Power	: 18/20 WATTS
Voltage	: 90 – 280 V AC 50/60 Hz
Power Factor	: >0.96
LED colors	: WW/NW/W
Lumen Flux	: 1800-2880Lm/2000-3200Lm
Dimension	: D-105 X H-90 mm
Cut-out diameter	: 94 mm
Driver	: External
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
Led used	: CREE ⇄
Dimmable Interface	: CASAMBI , Colour tunable (2700 K – 6000 K), DALI Edge pulse/0/1-10 V dimming control (optional)

BEAM ANGLE

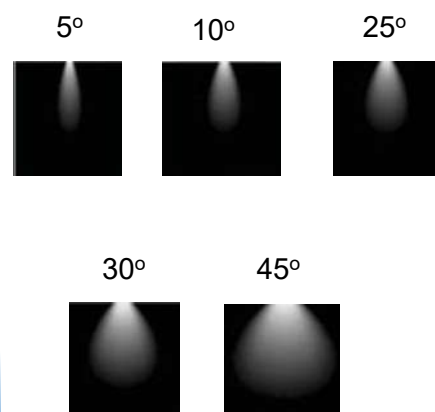

ORDERING INFORMATION

iLED	18/20	RDL	COB	330032	W	WW	NW
Brand name	Rated Power	Round Down Light	Chip On Board	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in

iLED Lighting Systems Pvt Ltd
Chennai, Tamil Nadu, India 600096